

# NEW PRODUCT NEWS

**mgt**  
MEGA TECH  
METALWORK

Tungaloy Report No. 550-G

External turning tool

# ADD M<sup>ULTI</sup> TURN

**Expansion of internal coolant tool holder  
for multi directional turning tool**





## ADD<sup>MULTI</sup>TURN



Ultra high productivity of Front Turning, Back Turning, Profiling,  
and Face Turning with **ONE SINGLE TOOL**

## ADD<sup>ULTI</sup>M TURN


### Innovative geometry for high productivity and process security

Double-sided 6-corner insert with 80° or 35° corner angle for versatile applications

- Back (pull) turning: High feed designed cutting edge improves productivity about 200% higher than existing ISO tools with no need for special programming.
- Front (push) turning: Same machining process is available using the same cutting edge angle as standard ISO tools.


#### 6C-TOMG

- Front turning
- Back turning

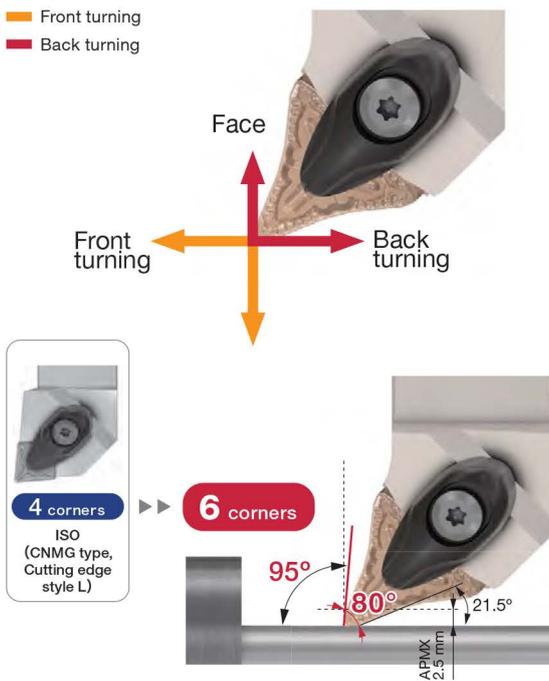


#### 6V-TOMG

- Front turning
- Back turning

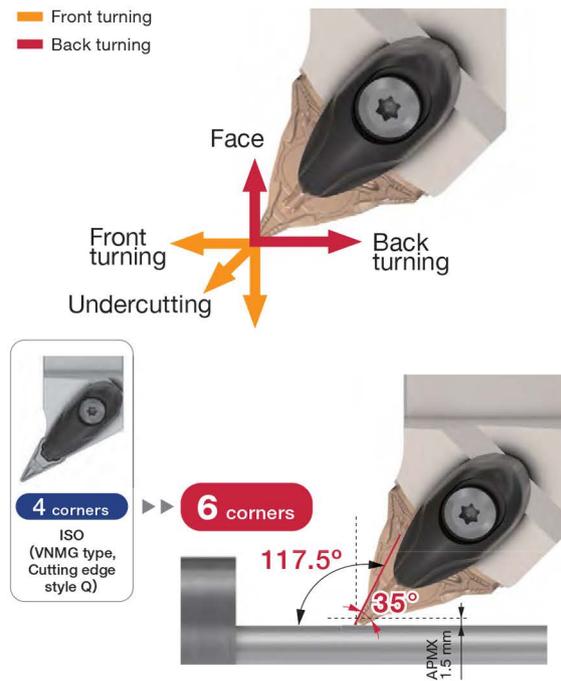


#### APPLICATION RANGE

Corner angle 80° + TM chipbreaker

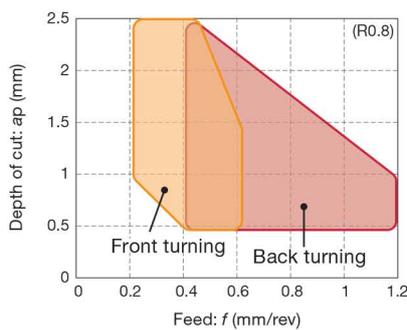

Corner angle 35° + TSF chipbreaker

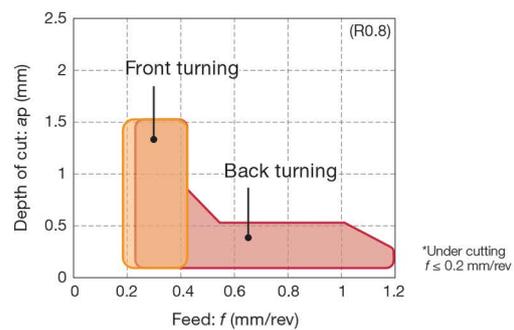

## Tungaloy Report No. 550-G

### Chip control


#### Double-sided 6-corner insert

**ADD<sup>ULTI</sup>TURN**  
6C-TOMG\*\*<sup>TM</sup>-TM


Insert : 6C-TOMG250608M-TM T9225  
Workpiece material : S45C / C45  
Cutting speed :  $V_c = 200$  m/min  
Coolant : Wet



#### Front turning

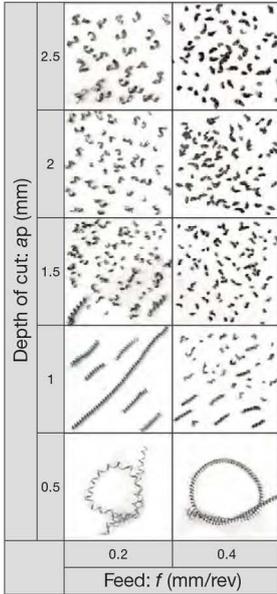

#### Back turning

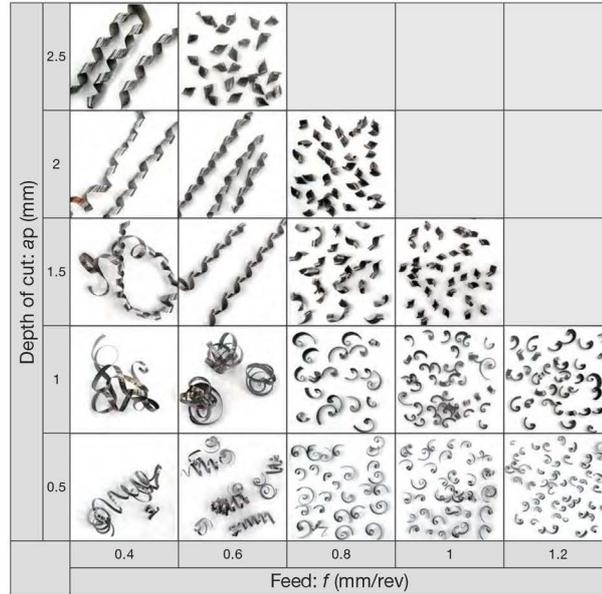

Front turning ← → Back turning

For  
6V-TOMG\*\*<sup>TSF</sup>  
chip control




#### Medium operation

- Front turning: Excellent chip control
- Back turning: Excellent chip control in high feed

### Tool life

#### Double-sided 6-corner insert

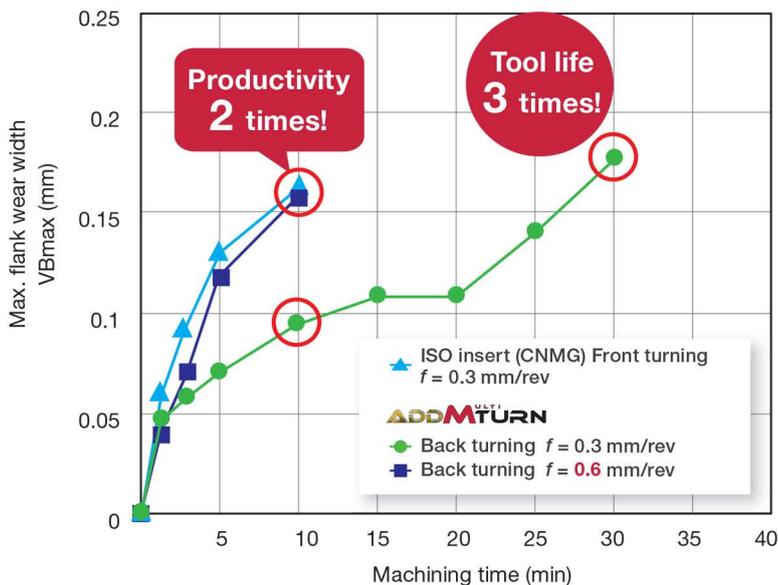

Insert : 6C-TOMG\*\*<sup>TM</sup>-TM T9225  
Workpiece material : S45C / C45  
Cutting speed :  $V_c = 250$  m/min  
Depth of cut :  $a_p = 1.5$  mm  
Coolant : Wet

ISO insert (CNMG)  
Front turning (10 minutes)



Feed:  $f = 0.3$  mm/rev

**ADD<sup>ULTI</sup>TURN**  
Back turning (10 minutes)



Feed:  $f = 0.3$  mm/rev

Feed:  $f = 0.6$  mm/rev

**AddMultiTurn insert provided triple tool life when fed at the same feed rate as ISO insert.  
Double the feed rate with AddMultiTurn compared with ISO insert without compromising tool life.**

## ADD<sup>ULTI</sup>TURN

### Expansion of PSC & square shank internal coolant tool holder for double-sided 6-corner inserts

**New**



PSC tool holder

P9

**New**




Square shank tool holder

P10 Will be released in 2025

#### Features

- High rigidity clamping system optimized for multi-directional and high feed turning
- Top 4 coolant holes covers front and back turning
- Effective for preventing crater wear, better chip control


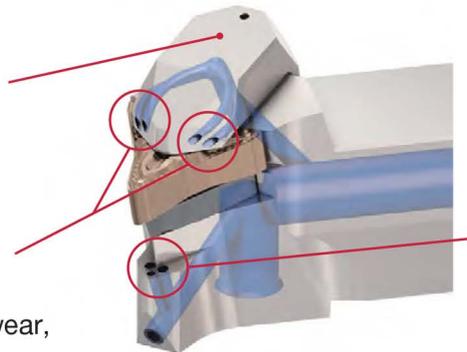


- Bottom 3 coolant holes effective for preventing flank wear and better surface finish

#### Internal coolant efficiency



Approx 4 times higher Coolant efficiency!

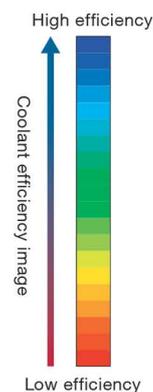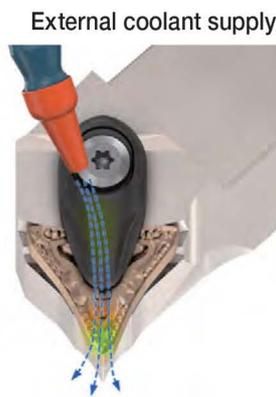


\*Internal evaluation

## Tungaloy Report No. 550-G

### ■ Improve chip control and tool life with internal coolant

**P** Alloy steel  
SCM440 / 42CrMo4



- 1** Insert : 6C-TOMG250608M-TM T9215  
Toolholder : ATXOR2525X25-CHP  
Cutting speed :  $V_c = 250$  m/min  
Feed :  $f = 0.5$  mm/rev  
Depth of cut :  $a_p = 1$  mm

#### Back turning



		<b>New</b> Internal coolant 14 MPa	<b>New</b> Internal coolant 7 MPa	External coolant (Normal pressure)
Depth of cut: $a_p$ (mm)	1			
	0.5	Feed: $f$ (mm/rev)		

#### 2 Front turning

Insert : 6C-TOMG250608M-TM T9215  
Cutting speed :  $V_c = 250$  m/min  
Feed :  $f = 0.3$  mm/rev  
Depth of cut :  $a_p = 1.5$  mm

#### Back turning

Insert : 6C-TOMG250608M-TM T9215  
Cutting speed :  $V_c = 250$  m/min  
Feed :  $f = 1$  mm/rev  
Depth of cut :  $a_p = 1$  mm

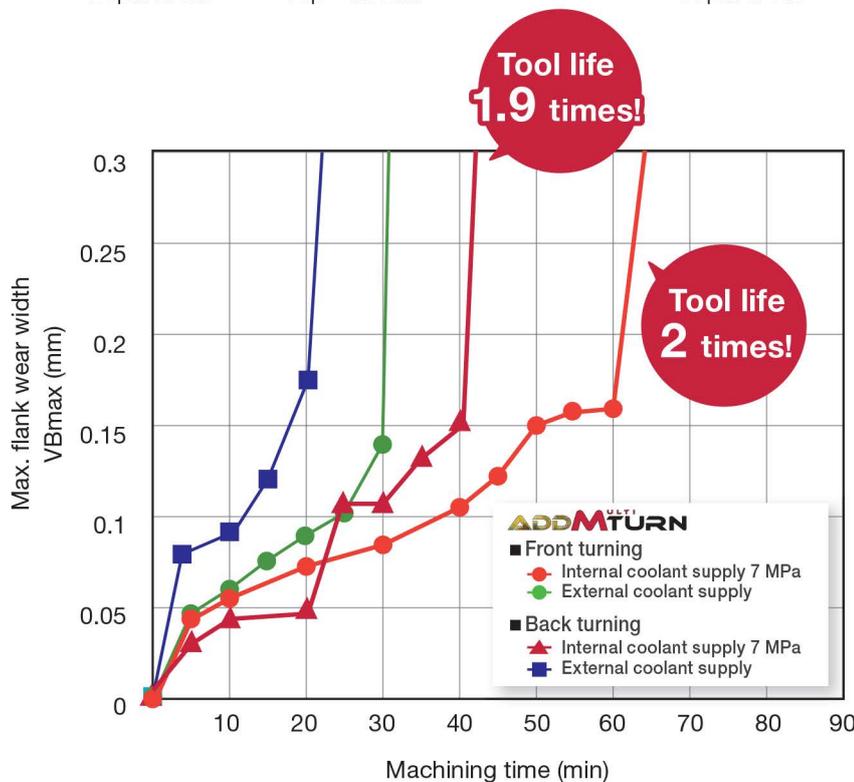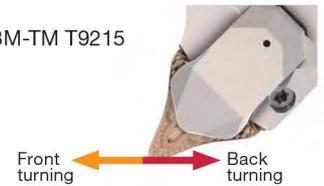

#### ADDM<sup>ULTI</sup>TURN

##### Front turning (30 minutes)




Internal coolant supply  
7 MPa




External coolant supply  
(Normal pressure)

#### ADDM<sup>ULTI</sup>TURN

##### Back turning (20 minutes)



Internal coolant supply  
7 MPa

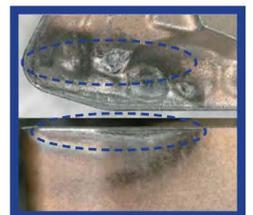

External coolant supply  
(Normal pressure)

**New Internal coolant tool holder achieved 2 times longer in front turning, 1.9 times longer in back turning compared with external coolant supply!**

# ADD<sup>ULTI</sup>TURN

### ■ Improve chip control and tool life with internal coolant

**M** Stainless steel  
SUS304 / X5CrNi18-9




- 1** Insert : 6C-TOMG250608M-TM AH8015  
 Toolholder : ATXOR2525X25-CHP  
 Cutting speed :  $V_c = 250$  m/min  
 Feed :  $f = 0.5$  mm/rev  
 Depth of cut :  $a_p = 1$  mm

Back turning

	<b>New</b> Internal coolant 14 MPa	<b>New</b> Internal coolant 7 MPa	External coolant (Normal pressure)
Depth of cut: $a_p$ (mm)	1		
	0.5		
	Feed: $f$ (mm/rev)		

- 2** Insert : 6C-TOMG250608M-TM AH8015  
 Workpiece material : SUS304 / X5CrNi18-9  
 Cutting speed :  $V_c = 150$  m/min  
 Feed :  $f = 0.8$  mm/rev.  
 Depth of cut :  $a_p = 1$  mm

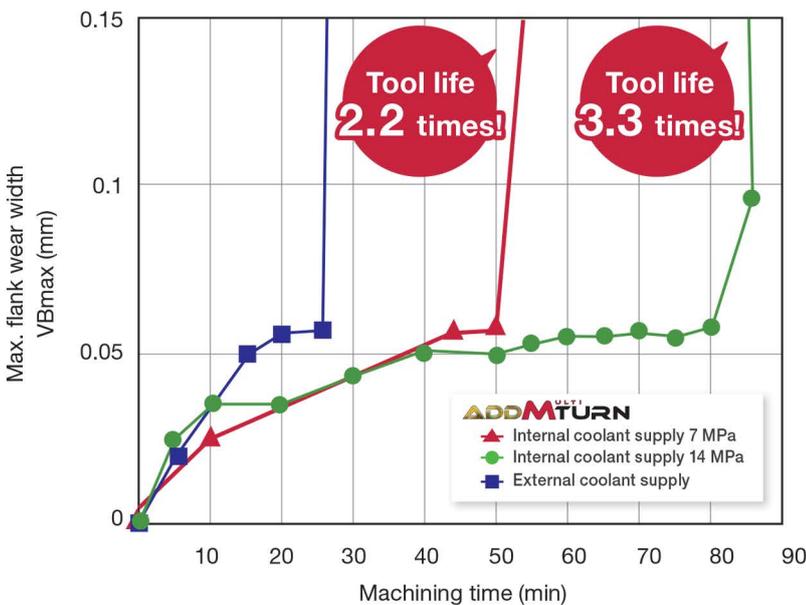

ADD<sup>ULTI</sup>TURN  
Back turning (20 minutes)



Internal coolant supply  
7 MPa




External coolant supply  
(Normal pressure)

**New Internal coolant tool holder achieved 2.2 times longer tool life compared with external coolant supply! Tool life extended to 3.3 times longer with high-pressure coolant.**

**New**

### C-ATXOR/L-CHP

Double-clamp toolholder, with 95° approach angle, for negative 80°/70° rhombic inserts (TurningA)

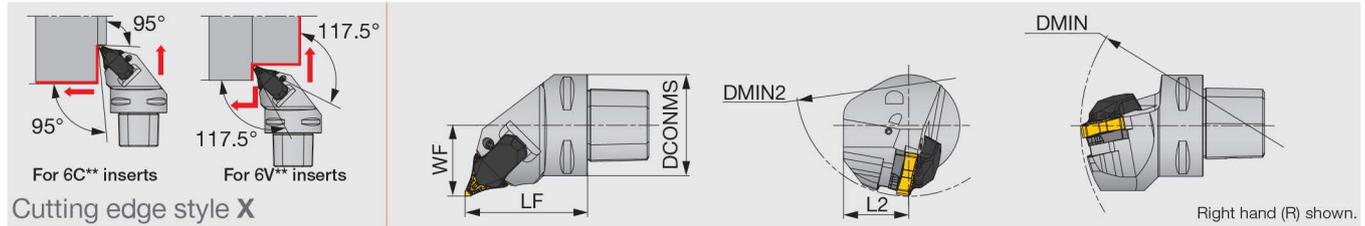


Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert	Torque*
C4ATXOR/L27050-25-CHP	40	50	25	27	140	110	0.8	6C/6V-TOMG2506**	3
C5ATXOR/L35060-25-CHP	50	60	32	35	165	110	0.8	6C/6V-TOMG2506**	3
C6ATXOR/L45065-25-CHP	63	65	32	45	190	120	0.8	6C/6V-TOMG2506**	3

Torque\*: Recommended clamping torque (N-m)  
RE\*\*: Standard corner radius

**New**

### C-ATEON-CHP

Double-clamp toolholder, with 50° approach angle, for negative 80°/70° rhombic inserts

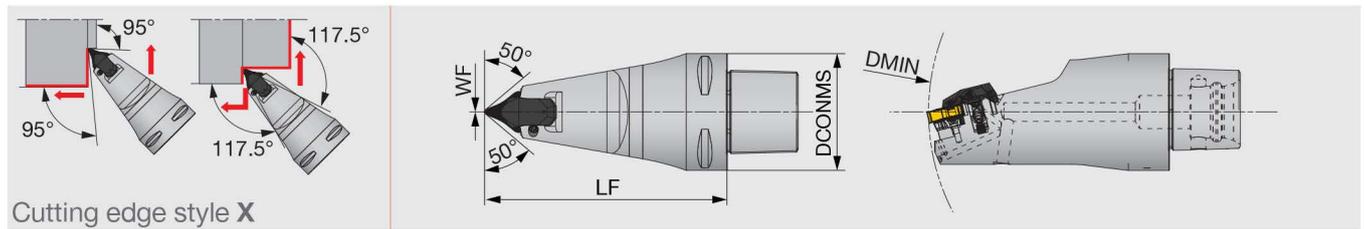

Designation	DCONMS	LF	WF	DMIN	RE**	Insert	Torque*
C6ATEON00130-25-CHP	63	130	0	190	0.8	6C/6V-TOMG2506**	3

Torque\*: Recommended clamping torque (N-m)  
RE\*\*: Standard corner radius

#### SPARE PARTS

Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench	O-ring
C*ATXOR/L****-25-CHP, C6ATEON00130-25-CHP	AC-Y-PRISM-CHP	SR 11800782	LST33	CSTB-3.5	BP-4.5	T-15F	ORAS568-2.62X6.02


# ADD<sup>MULTI</sup>TURN

**New**

### ATXOR/L-CHP

★: Will be released in 2025

Double-clamp toolholder with 95° and 117.5° approach angle, for negative 80° and 35° triangular inserts

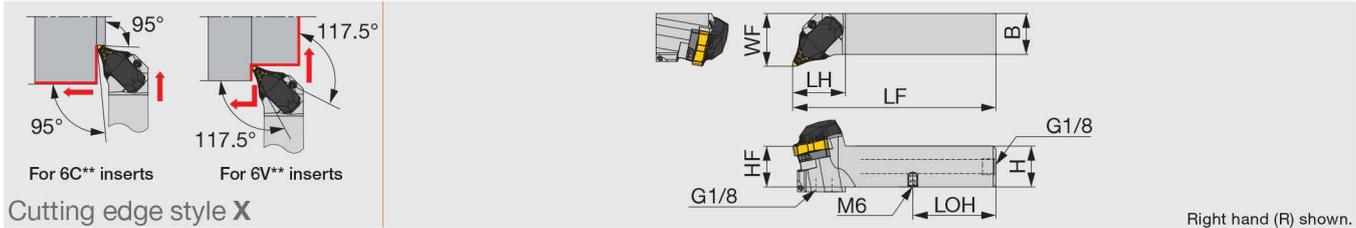

Designation	H	B	LF	LH	LOH	HF	WF	RE**	Insert	Torque*
ATXOR/L2020X25-CHP	20	20	122	32	61.75	20	25	0.8	6C/6V-TOMG2506**	3
ATXOR/L2525X25-CHP	25	25	122	32	56.25	25	32	0.8	6C/6V-TOMG2506**	3

Torque\*: Recommended clamping torque (N·m)  
RE\*\*: Standard corner radius  
Applicable for 14 MPa pressure coolant

Parts for coolant hose information




#### SPARE PARTS

Designation	Clamp	Clamp screw	Shim	Shim screw	Spring	Wrench	O-ring
ATXOR/L***X25-CHP	AC-Y-PRISM-CHP	SR 11800782	LST33	CSTB-3.5	BP-4.5	T-15F	ORAS568-2.62X6.02

### ATXOR/L

Double-clamp toolholder with 95° and 117.5° approach angle, for negative 80° and 35° triangular inserts

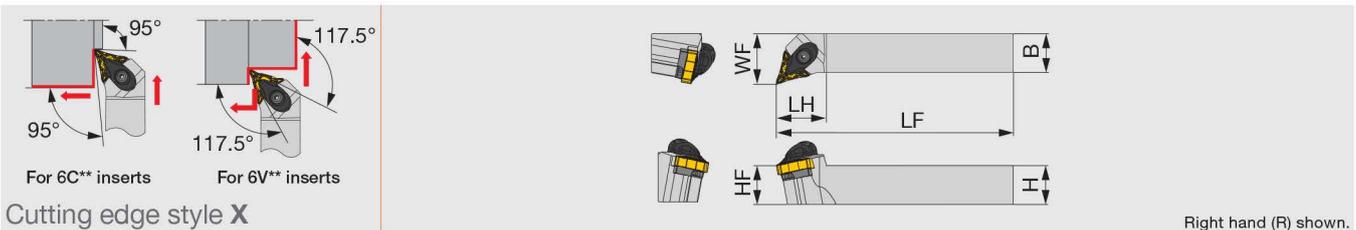

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
ATXOR/L2020K25-A	20	20	125	32	20	25	0.8	6C/6V-TOMG2506...	3
ATXOR/L2525M25-A	25	25	150	32	25	32	0.8	6C/6V-TOMG2506...	3
ATXOR/L3232P25-A	32	32	170	32	32	40	0.8	6C/6V-TOMG2506...	3

Torque\*: Recommended clamping torque (N·m)  
RE\*\*: Standard corner radius


#### SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
ATXOR/L**25-A	ACP4S	ACS-5W	BP-7	SP-2.5	LST33 KS15F	CSTB-3.5	T-15F


## Tungaloy Report No. 550-G

### INSERT

#### 6V-TOMG\*\*F-TSF

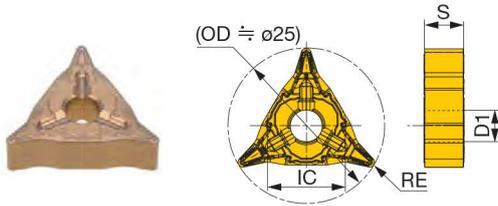

#### 6C-TOMG\*\*M-TM

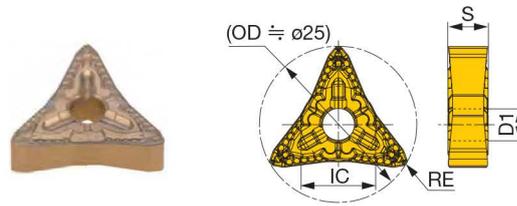

<b>P</b> Steel	★	★								
<b>M</b> Stainless	☆		☆							
<b>K</b> Cast iron	☆									
<b>N</b> Non-ferrous										
<b>S</b> Superalloys			★							
<b>H</b> Hard materials										

★ : First choice  
☆ : Second choice

Designation	RE	Coated									IC	S	D1	
		T9215	T9225	AH8015										
6V-TOMG250604F-TSF	0.4	●	●	●								12.7	6.35	5.16
6V-TOMG250608F-TSF	0.8	●	●	●								12.7	6.35	5.16
6C-TOMG250608M-TM	0.8	●	●	●								12.1	6.35	5.16
6C-TOMG250612M-TM	1.2	●	●	●								12.1	6.35	5.16

Please note: When machining using the pull face-turning method, the **6V-TOMG2506...** insert may interfere with workpieces having an external diameter of 70 mm or smaller, and the **6C-TOMG2506...** insert may interfere with workpieces of 30 mm or smaller.

● : Line up

\*Products are made by license; PrimeTurning is a proprietary technology of AB Sandvik Coromant.


# ADD<sup>MULTI</sup>TURN

### ■ Single-sided 3-corner insert for super high productivity


- Back (pull) turning: High feed designed cutting edge improves productivity 300 - 400% higher than standard ISO tools.
- Front (push) turning: Applicable for large D.O.C.

### 3C-TCMT

- Front turning
- Back turning

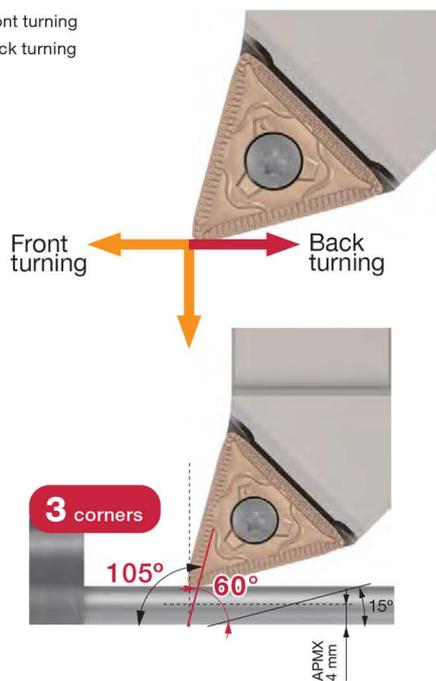


Unique cutting edge (Corner R + large radius arc) enables higher feed rates to be applied and better wear resistance for long tool life

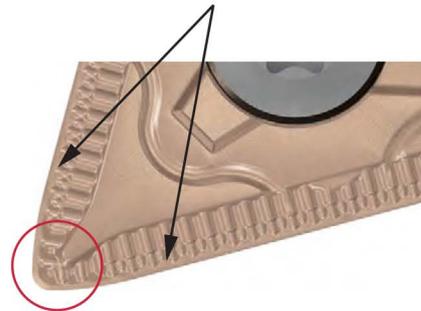

### ■ APPLICATION RANGE


#### Single-sided 3-corner + TM chipbreaker

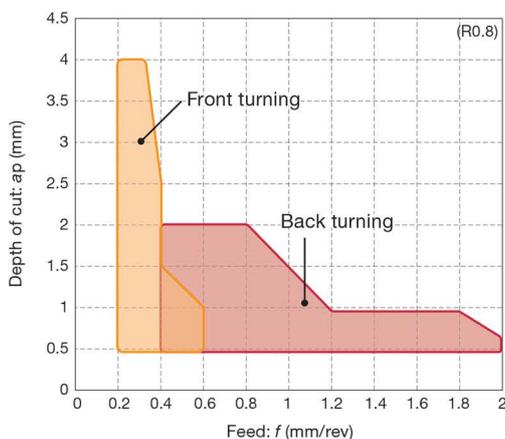

## Tungaloy Report No. 550-G

### STXCR/L-CHP-MC

Screw-on toolholder with 105° approach angle, for positive triangular inserts

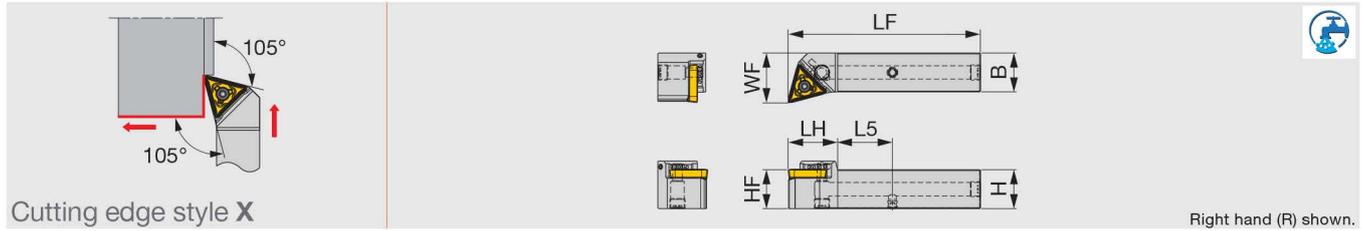

Designation	H	B	LF	LH	HF	WF	L5	Insert	Torque*
STXCR/L2525X29-CHP-MC	25	25	122	32	25	32	35	3C-TCMT29X6...	5


Torque\*: Recommended clamping torque (N·m)

#### SPARE PARTS

Designation	Clamping screw	Grip	Torx bit	Coolant plug
STXCR/L2525X29-CHP-MC	CSTB-5	H-TB2W	BT20M	PLUGG1/8-6.5TL360

## INSERT

### 3C-TCMT\*\*-TM

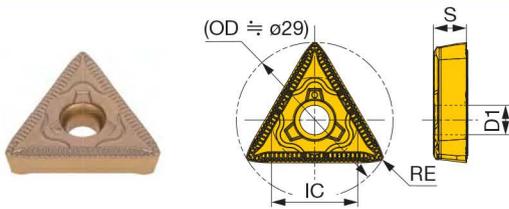

Designation	RE	Coated						IC	S	D1
		T9215								
3C-TCMT29X608-TM	0.8	●						16	6.15	5.5


Please note that 3C-TCMT... insert is not recommended for pull face-turning method (pulling the insert away from the part center). ● : Line up

\*Products are made by license; PrimeTurning is a proprietary technology of AB Sandvik Coromant.

## ADD<sup>ULTI</sup>TURN




### Y-PRISM Secure insert clamping system

- **Y-PRISM**'s safe lock design has a rail on the shim/toolholder and matching slot on the insert for tight interlocking and secure clamping.
- Prevents the cutting forces from affecting the tool position in any direction and ensures high stability.

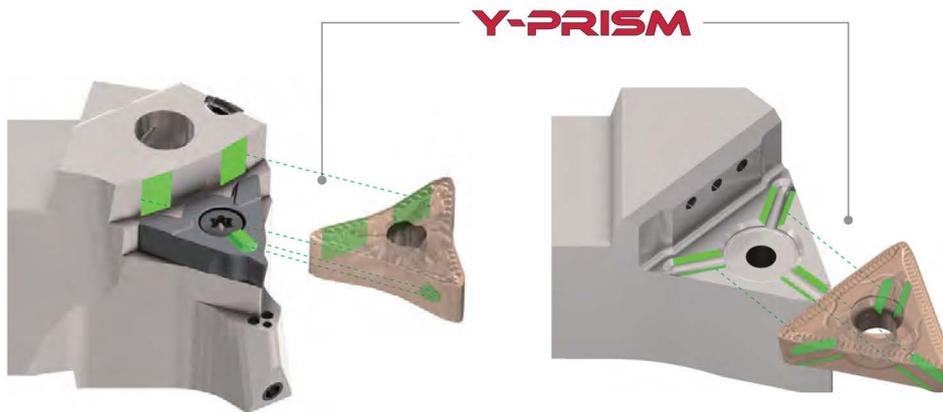

### Clamp rigidity – cutting point displacements after machining (Back turning → Front turning)

**Y-PRISM** achieved high accuracy cutting edge position!!

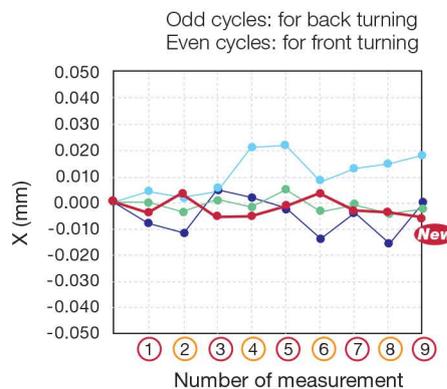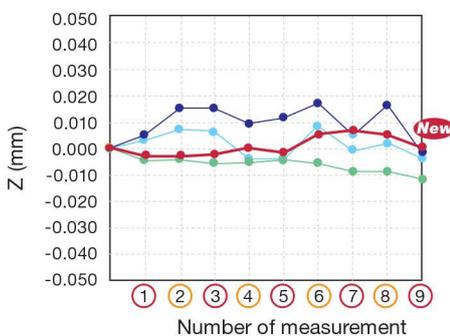

- **ADD<sup>ULTI</sup>** Insert: **6C-TOMG250608M-TM**
  - **ADD<sup>ULTI</sup>** Insert: **3C-TCMT29X608-TM**
  - Competitor
- Workpiece material : S45C / C45  
Cutting speed :  $V_c = 250$  m/min
- **Back turning**  
Feed :  $f = 1$  mm/rev  
Depth of cut :  $a_p = 1$  mm
- **Front turning**  
Feed :  $f = 0.4$  mm/rev  
Depth of cut :  $a_p = 1.5$  mm

### ■ Cautions when mounting the insert on the holder

- 1 Ensure that the rail on the shim/toolholder is positioned on the matching slot on the insert




- 2 Ensure that the clamp is tightened on the shim and insert using the proper torque



Note: As the insert and shim/toolholder are interlocked on the rail and slot, it is no problem to have the clearance shown above.

- 3 Programming sample to change from front turning to back turning

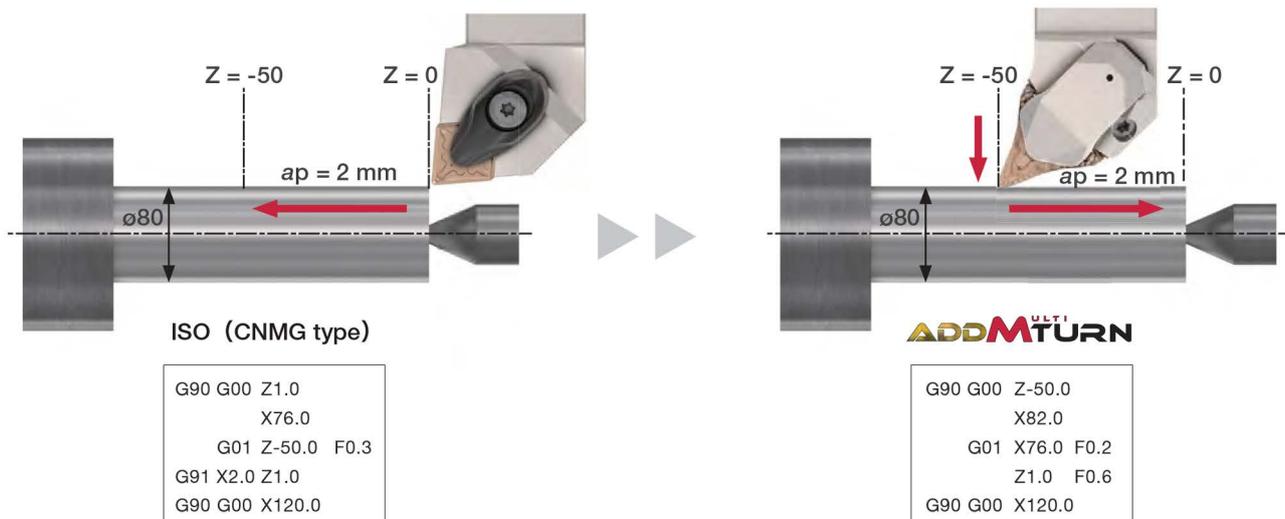

\*When entering the cut, feed the tool at 0.2 mm/rev or use roll-in approach.

\*When turning away from the main chuck, the cutting edge contact with the workpiece becomes larger, generating greater cutting load than when turning towards the chuck. Always use the tailstock support.

# ADD<sup>ULTI</sup>MTURN

### GRADES

Grade	Recommended workpiece material	Feature
<b>PREMIUMTEC</b> <b>T9215</b>	<b>P M K</b>	<ul style="list-style-type: none"> <li>- Well-balanced wear and chipping resistance</li> <li>- First choice for steel</li> <li>- High versatility for a wide range of applications</li> </ul>
<b>PREMIUMTEC</b> <b>T9225</b>	<b>P</b>	<ul style="list-style-type: none"> <li>- First choice for roughing to medium cutting</li> <li>- High fracture resistance</li> </ul>
<b>PREMIUMTEC</b> <b>AH8015</b>	<b>M S</b>	<ul style="list-style-type: none"> <li>- PVD coated grade with a balanced resistance to wear and fracture</li> <li>- First choice for stainless steel and heat-resistant superalloys</li> </ul>

### STANDARD CUTTING CONDITIONS

Double-sided 6-corner insert






ISO	Operation	Chipbreaker	Grade	Depth of cut: $a_p$ (mm)		Feed: $f$ (mm/rev)		Cutting speed $V_c$ (m/min)
				Front turning	Back turning	Front turning	Back turning	
<b>P</b>	Finishing	TSF	T9215	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	150 - 400
		TSF	T9225	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	80 - 300
	Medium to heavy cutting	TM	T9215	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	150 - 400
		TM	T9225	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	80 - 300
<b>M</b>	Finishing	TSF	T9215	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	100 - 250
		TSF	AH8015	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	90 - 190
	Medium to heavy cutting	TM	T9215	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	100 - 250
		TM	AH8015	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	90 - 190
<b>K</b>	Finishing	TSF	T9215	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	140 - 500
	Medium to heavy cutting	TM	T9215	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	140 - 500
<b>S</b>	Finishing	TSF	AH8015	0.2 - 1.5	0.2 - 1.5	0.08 - 0.4	0.2 - 1.2	20 - 80
	Medium to heavy cutting	TM	AH8015	0.5 - 2.5	0.5 - 2.5	0.2 - 0.6	0.4 - 1.2	20 - 80

Single-sided 3-corner insert

ISO	Operation	Chipbreaker	Grade	Depth of cut: $a_p$ (mm)		Feed: $f$ (mm/rev)		Cutting speed $V_c$ (m/min)
				Front turning	Back turning	Front turning	Back turning	
<b>P</b>	Medium to heavy cutting	TM	T9215	0.5 - 4	0.5 - 2	0.2 - 0.6	0.4 - 2	150 - 400
<b>M</b>	Medium to heavy cutting	TM	T9215	0.5 - 4	0.5 - 2	0.2 - 0.6	0.4 - 2	100 - 250
<b>K</b>	Medium to heavy cutting	TM	T9215	0.5 - 4	0.5 - 2	0.2 - 0.6	0.4 - 2	140 - 500

## Tungaloy Report No. 550-G

### PRACTICAL EXAMPLES

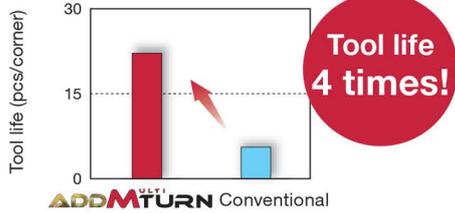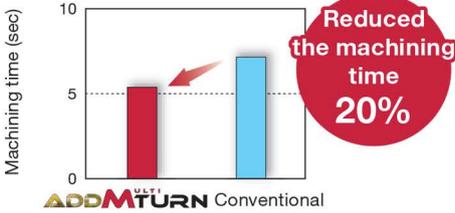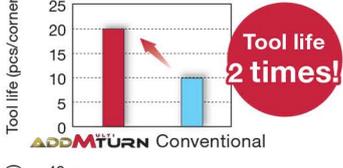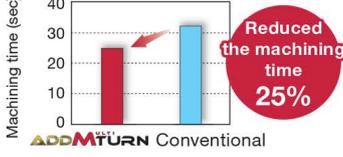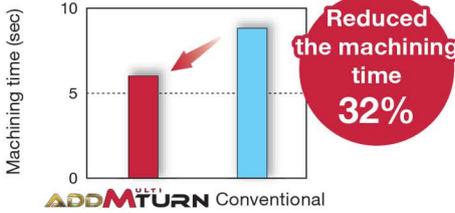Workpiece type		Automotive part	Wheels
Toolholder		ATXOR2525X25-CHP	C5ATXOR35060-25-CHP
Insert		6C-TOMG250612M-TM	6C-TOMG250608M-TM
Grade		T9215	T9215
Workpiece material		SUP10 (51CrV4)	FCD500
		 <b>P</b>	 <b>K</b>
Cutting conditions	Cutting speed : Vc (m/min)	200	250
	Feed : f (mm/rev)	0.35 - 1	0.35 - 0.6
	Depth of cut : ap (mm)	Max 2.5	1.2
	Machining	Face and External turning	Face and External turning
	Coolant	Internal coolant (4MPa)	Internal coolant (Normal pressure)
Results		 <p><b>Tool life 4 times!</b></p> <p>New internal coolant <b>AddMultiTurn</b> extends tool life by 4 times, thanks to effective coolant supply at 4 MPa.</p>	 <p><b>Reduced the machining time 20%</b></p> <p>New internal coolant <b>AddMultiTurn</b> reduced machining time by 20% thanks to high feed back turning, while tool life was equal to or better than current tools.</p>
Workpiece type		Atomizer part	Input shaft
Toolholder		ATXOR2525X25-CHP	ATXOL2525M25-A
Insert		6C-TOMG250612M-TM	6C-TOMG250608M-TM
Grade		AH8015	T9215
Workpiece material		INCONEL 625	SCr420 / 20Cr4
		 <b>S</b>	 <b>P</b>
Cutting conditions	Cutting speed : Vc (m/min)	50	147
	Feed : f (mm/rev)	0.25 - 0.44	Face turning: 0.35, External turning: 0.5
	Depth of cut : ap (mm)	Max 2	Face turning: 1 - 2, External turning: 0.5
	Machining	External turning	Face turning, External turning
	Coolant	Internal coolant (4MPa)	Wet (External coolant)
Results		 <p><b>Tool life 2 times!</b></p>  <p><b>Reduced the machining time 25%</b></p> <p>New internal coolant <b>AddMultiTurn</b> extended tool life by 2 times and reduced machining time by 25%, thanks to high-feed back turning and effective coolant supply at 4 MPa.</p>	 <p><b>Reduced the machining time 32%</b></p> <p><b>AddMultiTurn</b> reduced machining time by 32% and prevented burr formation thanks to high-feed back turning.</p>



**TaeguTec**  
Member IMC Group

Member IMC Group  
**NTK**  
CUTTING TOOLS

**TOOL FLO**  
Member IMC Group

Member IMC Group  
**Tungaloy**

**SLOKY**<sup>®</sup>

# mgt

**MEGA TECH  
METALWORK**

## CONTACT

Tel : 02-943-1591

Line ID : @mgt\_metalwork

Email : sales.m@mgtg.co.th

Web : <http://www.mgtg.co.th/>

17/4 Soi Ramintra 89  
Ramintra Khannayao  
Bangkok 10230

## SCAN QR CODE

For more information

