

NEW PRODUCT NEWS

mgt
MEGA TECH
METALWORK

Tungaloy Report No. 369-G

Insert with 25° corner angle for profiling

Y-PRO SERIES

Expansion of ground type YCGT inserts!





Y-PRO SERIES



A new narrow corner angle insert that expands machining possibilities.

Y-PRO SERIES



Expansion of ground type YCGT insert with 25° corner angle!

New

JS

chipbreaker

For finish turning

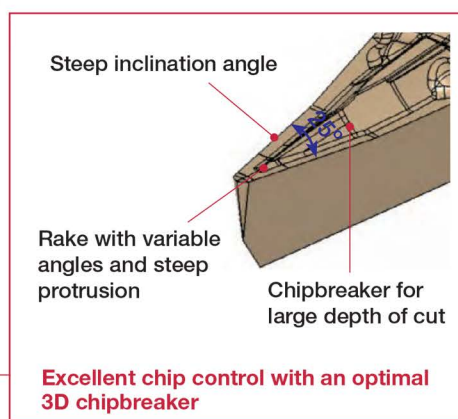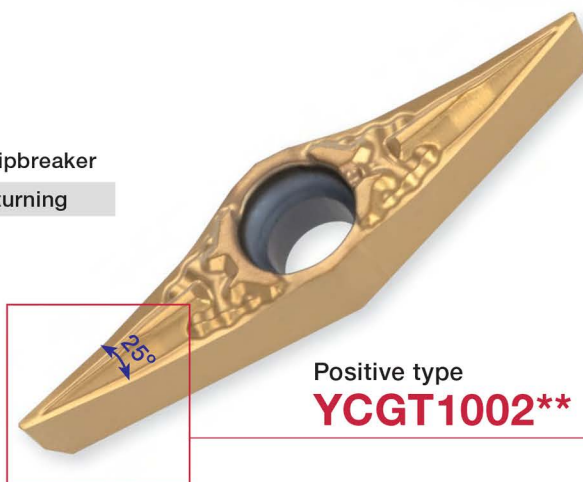

■ Chip control



P S45C / C45

Insert : YCGT100202MF-JS
SH7025
Cutting speed : $V_c = 80$ m/min
Feed : $f = 0.03$ mm/rev
Depth of cut : $a_p = 0.5$ mm
Coolant : Wet



P S45C / C45

Insert : YCGT100202MF-JS
SH7025
Cutting speed : $V_c = 80$ m/min
Feed : $f = 0.03$ mm/rev
Depth of cut : $a_p = 3$ mm
Coolant : Wet






M SUS304 / X5CrNi18-9

Insert : YCGT100202MF-JS
SH7025
Cutting speed : $V_c = 80$ m/min
Feed : $f = 0.03$ mm/rev
Depth of cut : $a_p = 2$ mm
Coolant : Wet

■ Chip control range

Single JS chipbreaker handles from roughing to finishing operations



■ YCGT further expands the machining possibilities

■ Application examples


YCGT offers a new method for the turning process



Adapter



Shaft



■ New insert grade for high surface quality

SH7025




- The latest grade with a sharp cutting edge, designed for small part machining.
- A combination of a columnar-structured TiCN coating and multilayered TiAlN coating provides superior surface quality and process security.

Designed to prevent built-up edge, wear, and edge chipping, SH7025 provides long, predictable tool life and superior surface quality



■ Cutting performance

Face turning



Below images are viewed in this direction

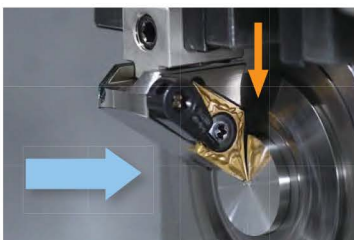

SH7025

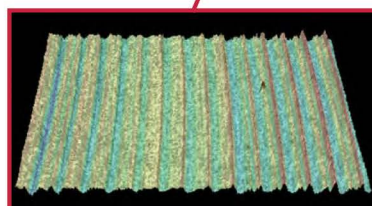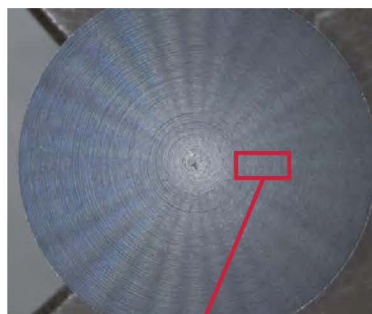

Conventional

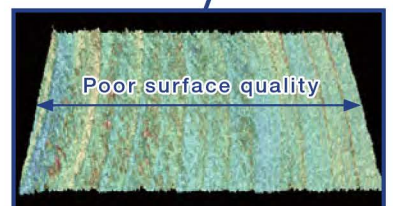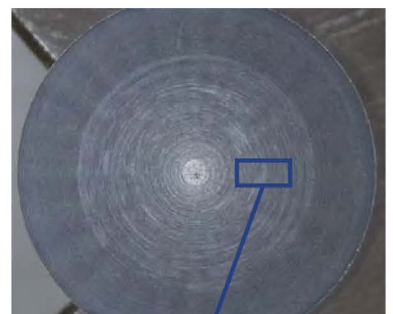

P SUJ2 / 100Cr6

Insert : DCGT11T302 type
Cutting speed : $V_c = 150$ m/min
Feed : $f = 0.05$ mm/rev
Depth of cut : $a_p = 0.3$ mm
Coolant : Wet


Provides high quality surface finish

Y-PRO SERIES


■ M-class insert

ZF/ZM chipbreaker


For General turning

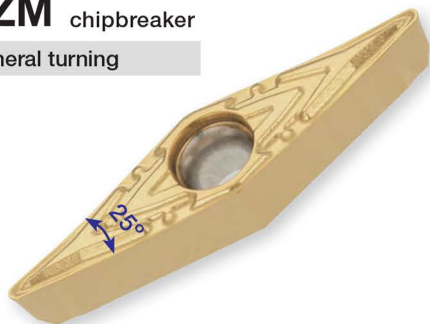

Positive type
YWMT11T2**
YWMT16T3**

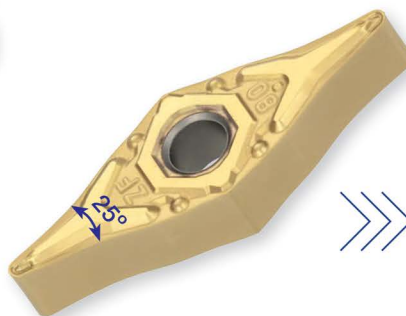

Negative type
YNMG1604**



YNMG1604** **VNMG1604****
YNMG inserts fit existing standard
turning toolholders for VNMG insert


■ Suitable for a wide range of machining applications




Spherical profiling



Face profiling




"V" grooving



External undercutting



Internal undercutting




Internal profiling



YW

**Rhombic, 25°
with hole
Positive 7°**

[illegible]

New

● : New product
● : Line up


Tolerance



Insert **NEGATIVE TYPE**

YN

**Rhombic, 25°
with hole**

[illegible]

● : Line up

Y-PRO SERIES

MODULAR HEADS

New

QC-JSVJ2CR-CHP

Screw-on modular head with 93° approach angle, for positive 25° rhombic inserts, with high pressure coolant capability



Cutting edge style J2

Designation	H	B	LH	HF	WF	OAW	RE**	Insert	Torque*	Coupling size
QC12-JSYJ2CR10-CHP	12	12	19.5	12	6	15	0.2	YCGT1002...	0.7	QC12
QC16-JSYJ2CR10-CHP	16	16	21	16	8	20	0.2	YCGT1002...	0.7	QC16

Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius

Assembled dimensions with shank are shown on page 19, 20.

SPARE PARTS


Designation	Clamping screw	Wrench 1	O-ring
QC12-JSYJ2CR10-CHP	CSTB-2L	T-6F	ORSS-0454.5X1.0NBR70
QC16-JSYJ2CR10-CHP	CSTB-2L	T-6F	ORSS-0757.5X1.0NBR70

TOOLHOLDER

New

JSYJ2CR

Screw-on toolholder with 93° approach angle, for YCGT inserts

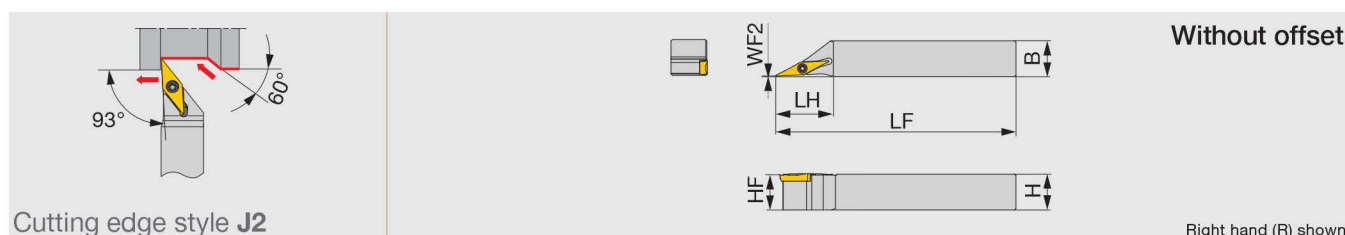

Cutting edge style J2

Designation	H	B	LF	LH	HF	WF2	RE**	Insert	Torque*
JSYJ2CR1212X10	12	12	120	19.5	12	0	0.2	YCGT1002...	0.7
JSYJ2CR1616X10	16	16	120	21	16	0	0.2	YCGT1002...	0.7

Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius


SPARE PARTS

Designation	Clamping screw	Wrench
JSYJ2CR...	CSTB-2L	T-6F

Tungaloy Report No. 369-G

SYJBR/L

Screw-on toolholder with 93° approach angle, for positive 25° rhombic inserts

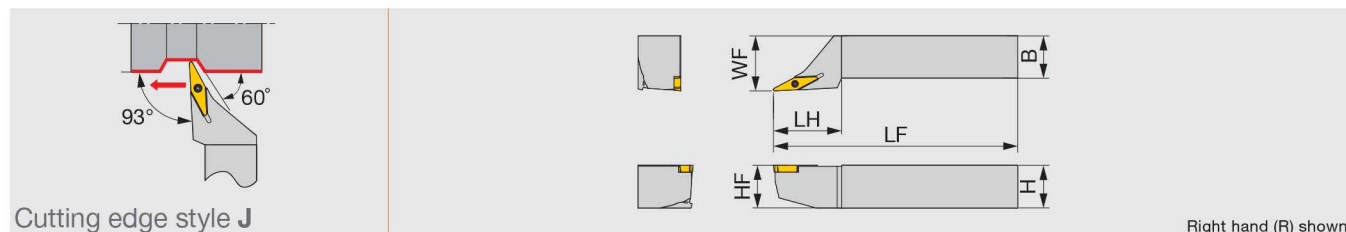

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
SYJBR/L2020K16	20	20	125	35	20	25	0.8	YWMT16T3...	1.3
SYJBR/L2525M16	25	25	150	40	25	32	0.8	YWMT16T3...	1.3


Torque*: Recommended clamping torque (N·m)
RE**: Standard corner radius

SPARE PARTS

Designation	Clamping screw	Wrench
SYJBR/L...	CSTB-2.5L080	T-8F

SYIBN

Screw-on toolholder with 77.5° approach angle, for positive 25° rhombic inserts

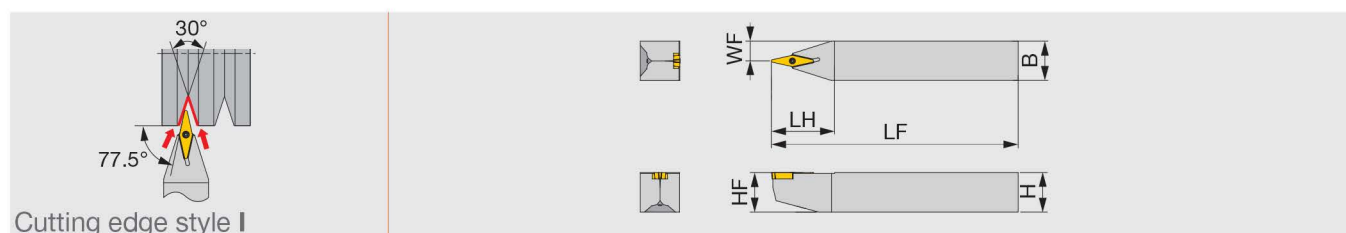

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
SYIBN2020K16	20	20	125	32	20	10	0.8	YWMT16T3...	1.3
SYIBN2525M16	25	25	150	40	25	12.5	0.8	YWMT16T3...	1.3

Torque*: Recommended clamping torque (N·m)
RE**: Standard corner radius


SPARE PARTS

Designation	Clamping screw	Wrench
SYIBN...	CSTB-2.5L080	T-8F

Y-PRO SERIES

SYQBR/L

Screw-on toolholder with 122.5° approach angle, for positive 25° rhombic inserts

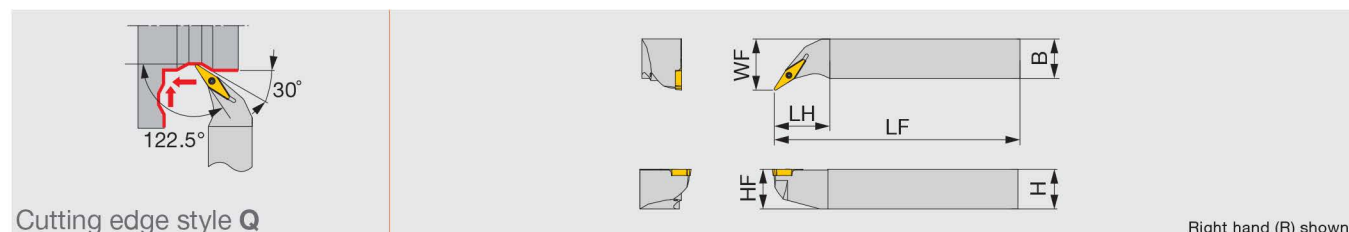

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
SYQBR/L2020K16	20	20	125	35	20	27	0.8	YWMT16T3...	1.3
SYQBR/L2525M16	25	25	150	35	25	32	0.8	YWMT16T3...	1.3

Torque*: Recommended clamping torque (N·m)


RE**: Standard corner radius

SPARE PARTS

Designation	Clamping screw	Wrench
SYQBR/L...	CSTB-2.5L080	T-8F

SYHBR/L

Screw-on toolholder with 100° approach angle, for positive 25° rhombic inserts

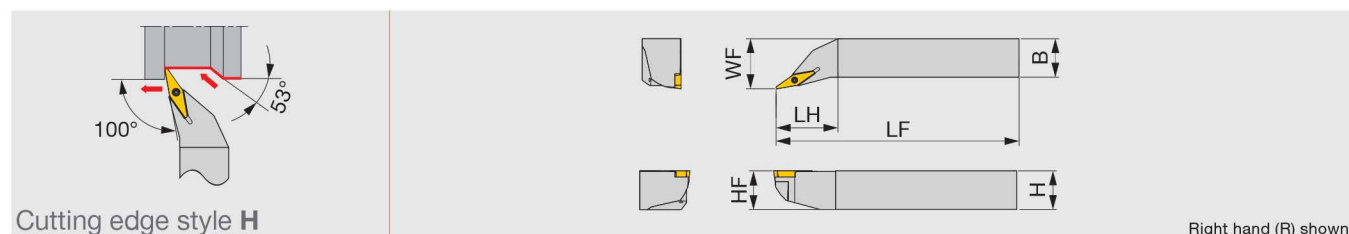

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
SYHBR/L2020K16	20	20	125	35	20	27	0.8	YWMT16T3...	1.3
SYHBR/L2525M16	25	25	150	40	25	32	0.8	YWMT16T3...	1.3

Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius


SPARE PARTS

Designation	Clamping screw	Wrench
SYHBR/L...	CSTB-2.5L080	T-8F

Tungaloy Report No. 369-G

A/E-SYUBR/L

Screw-on boring bar, for positive 25° rhombic inserts

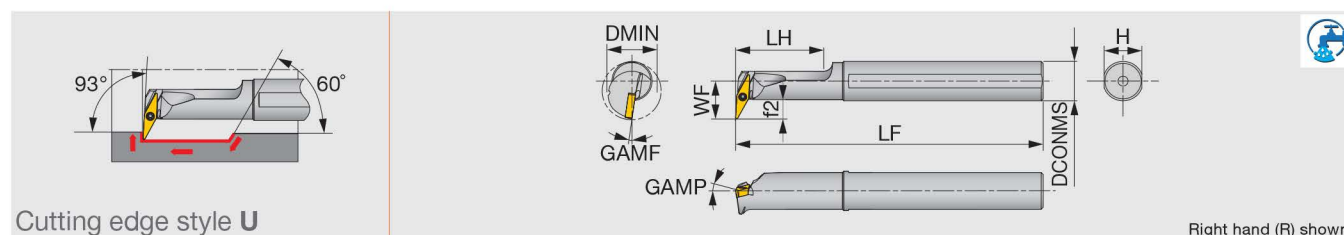

Designation	Material	DMIN	DCONMS	WF	LF	LH	H	f2	GAMP	GAMF	RE**	Insert	Torque*
A16Q-SYUBR/L11-D200	Steel	20	16	15.5	180	35	15	8	0°	-8°	0.4	YW**11T2...	0.7
E12Q-SYUBR/L11-D200	Carbide	20	12	13.5	180	27	11	7.5	0°	-8°	0.4	YW**11T2...	0.7
E16R-SYUBR/L11-D245	Carbide	24.5	16	16	200	32	15	8	0°	-8°	0.4	YW**11T2...	0.7

Torque*: Recommended clamping torque (N·m)


RE**: Standard corner radius

SPARE PARTS

Designation	Clamping screw	Wrench
A16Q-SYUBR/L11-D200	CSTB-2L	T-6F
E**SYUBR/L11-D...	CSTB-2L	T-6F

A/E-SYQBR/L

Screw-on boring bar, for positive 25° rhombic inserts

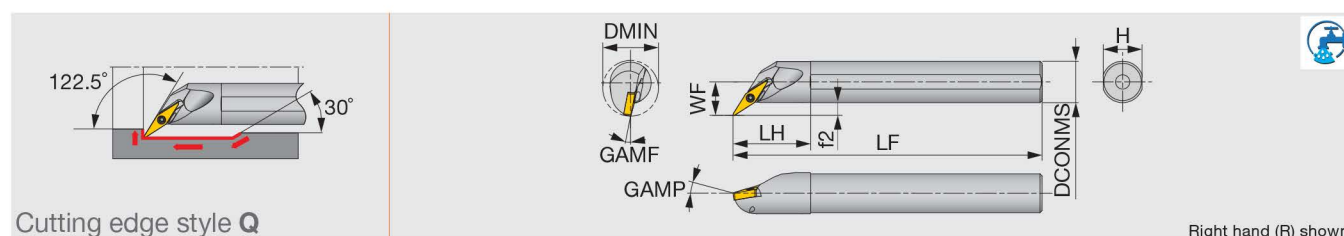

Designation	Material	DMIN	DCONMS	WF	LF	LH	H	f2	GAMP	GAMF	RE**	Insert	Torque*
A12M-SYQBR/L11-D170	Steel	17	12	10.5	150	24	11	4.5	-5°	-10°	0.4	YW**11T2...	0.7
A16Q-SYQBR/L11-D215	Steel	21.5	16	13	180	30	15	5	-5°	-8°	0.4	YW**11T2...	0.7
E12Q-SYQBR/L11-D170	Carbide	17	12	10.5	180	27	11	4.5	-5°	-10°	0.4	YW**11T2...	0.7
E16R-SYQBR/L11-D215	Carbide	21.5	16	13	200	32	15	5	-5°	-8°	0.4	YW**11T2...	0.7

Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius


SPARE PARTS

Designation	Clamping screw	Wrench
A**-SYQBR/L11-D...	CSTB-2L	T-6F
E**-SYQBR/L11-D...	CSTB-2L	T-6F

Y-PRO SERIES

AVJNR/L

Double-clamp toolholder with 93° approach angle, for negative 35°/25° rhombic inserts

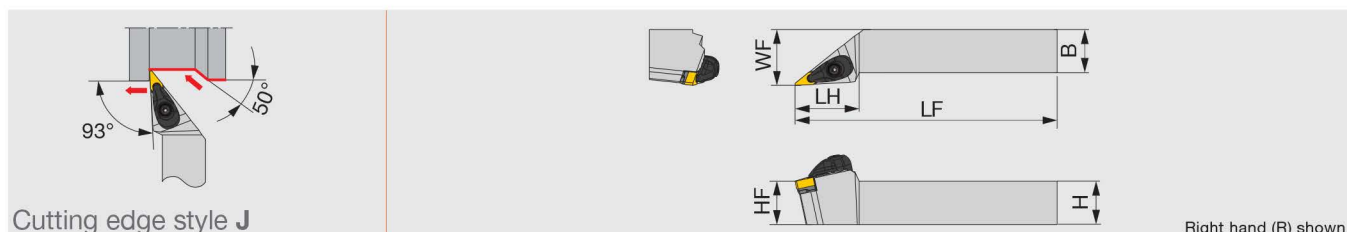

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
AVJNR/L2020K16-A	20	20	125	43	20	25	0.8	V/YN**1604...	3
AVJNR/L2525M16-A	25	25	150	46	25	32	0.8	V/YN**1604...	3

Torque*: Recommended clamping torque (N·m)
RE**: Standard corner radius

SPARE PARTS


Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
AVJNR/L**1204-A	ACP3L-E	ACS-5W	BP-7	SP-2.5	ASV222	CSTB-3.0	T-15F
AVJNR/L**16-A	ACP3L	ACS-5W	BP-7	SP-2.5	ASV322	CSTB-3.5	T-15F

PVJNR/L-CHP

Tube connection

Lever lock toolholders – 93° approach angle.

For negative 35°/25° rhombic insert. High-pressure coolant capability.

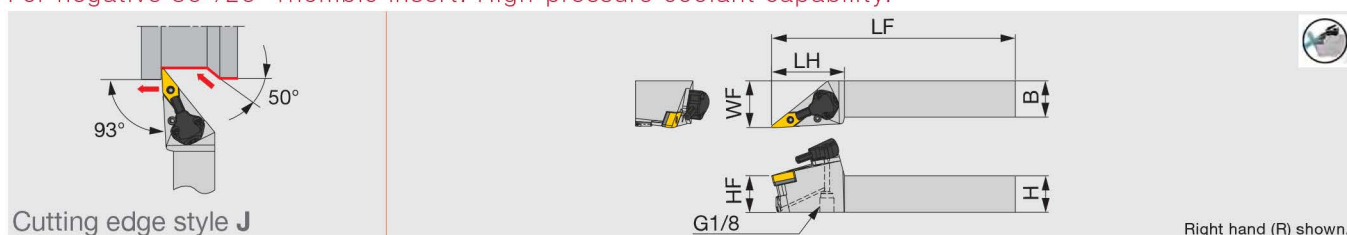

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PVJNR/L2020K16-CHP	20	20	125	50	20	32	0.8	V/YN**1604...	2
PVJNR/L2525M16-CHP	25	25	150	50	25	32	0.8	V/YN**1604...	2

Torque*: Recommended clamping torque (N·m)
RE**: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
PVJNR/L**1204-CHP	LSV212	LCS3V	P-2.5	LSP3	LCL3V
PVJNR/L**16-CHP	LSV317	LCS3V	P-2.5	LSP3	LCL3V


SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring	Coolant screw	Wrench 3
PVJNR/L**1204-CHP	CU-V-CHP	SR M3	T-8F	OR 6.4X0.9N	SR M4X4 DIN913 TL360	P-2
PVJNR/L**16-CHP	CU-V-CHP	SR M3	T-8F	OR 6.4X0.9N	SR M4X4 DIN913 TL360	P-2

Tungaloy Report No. 369-G

C-PVJNR/L-CHP

Lever lock toolholders with TungCap connection – 93° approach angle.
For negative 35°/25° rhombic insert. High-pressure coolant capability.

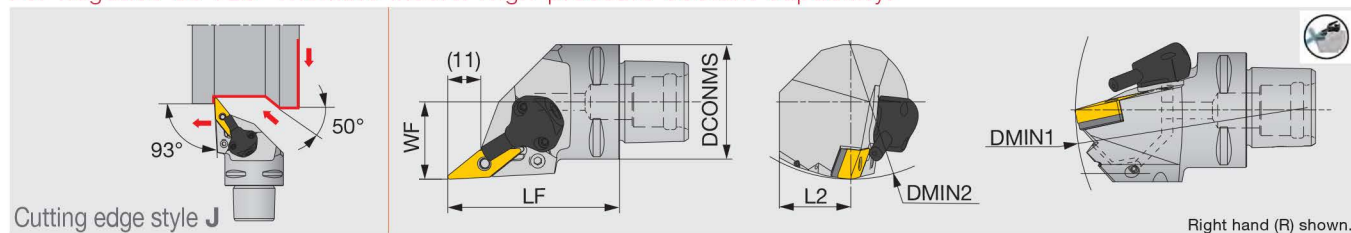

Designation	DCONMS	LF	L2	WF	DMIN1	DMIN2	RE**	Insert	Torque*
C4PVJNR/L27060-16-CHP	40	60	20	27	140	110	0.8	V/YN**1604...	2
C6PVJNR/L45065-16-CHP	63	65	31.5	45	190	81	0.8	V/YN**1604...	2

Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius

Applicable for 14 MPa pressure coolant

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
C*PVJNR/L*-1204-CHP	LSV212	LCS3V	P-2.5	LSP3	LCL3V
C*PVJNR/L...16-CHP	LSV317	LCS3V	P-2.5	LSP3	LCL3V

SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring
C*PVJNR/L*-1204-CHP	CU-V-CHP	SR M3	T-8F	OR 6.4X0.9N
C*PVJNR/L...16-CHP	CU-V-CHP	SR M3	T-8F	OR 6.4X0.9N


AVJNR/L-CHP

Direct connection

Tube connection

Double clamping tool holders-93° approach angle.

For negative 35° or 25° rhombic insert. High-pressure coolant capability with tube and direct connections.

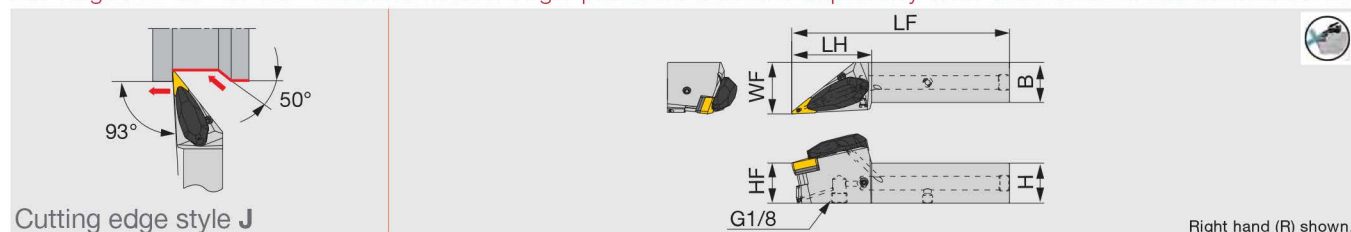

Designation	H	B	LF	LH	HF	WF	RE	Insert	Torque
AVJNR/L2020X16-CHP	20	20	122	50	20	25	0.8	V/YN**1604...	3
AVJNR/L2525X16-CHP	25	25	135	50	25	32	0.8	V/YN**1604...	3

Torque: Recommended clamping torque (N·m)


SPARE PARTS

Designation	Clamp	Clamping screw	Shim	Shim screw	Spring	Wrench	O-ring
AVJNR/L****16-CHP	ACP3L-CHP	SR 11800782	ASV322	CSTB-3.5	BP-4.5	T-15F	ORAS568-2.62X7.59

Y-PRO SERIES

AVVNN

Double-clamp toolholder with 72.5° approach angle, for negative 35°/25° rhombic inserts

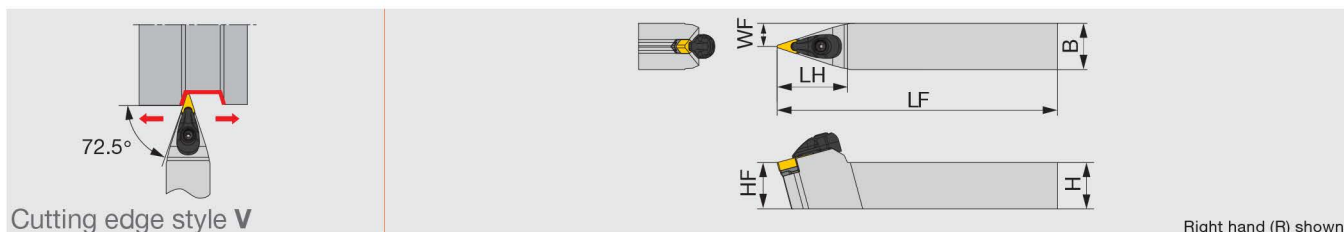

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
AVVNN2020K16-A	20	20	125	46	20	10	0.8	V/YN**1604...	3
AVVNN2525M16-A	25	25	150	46	25	12.5	0.8	V/YN**1604...	3

Torque*: Recommended clamping torque (N·m)


RE**: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
AVVNN**1204-A	ACP3L-E	ACS-5W	BP-7	SP-2.5	ASV222	CSTB-3.0	T-15F
AVVNN**16-A	ACP3L	ACS-5W	BP-7	SP-2.5	ASV322	CSTB-3.5	T-15F

AVQNR/L

Double-clamp toolholder with 117.5° approach angle, for negative 35°/25° rhombic inserts

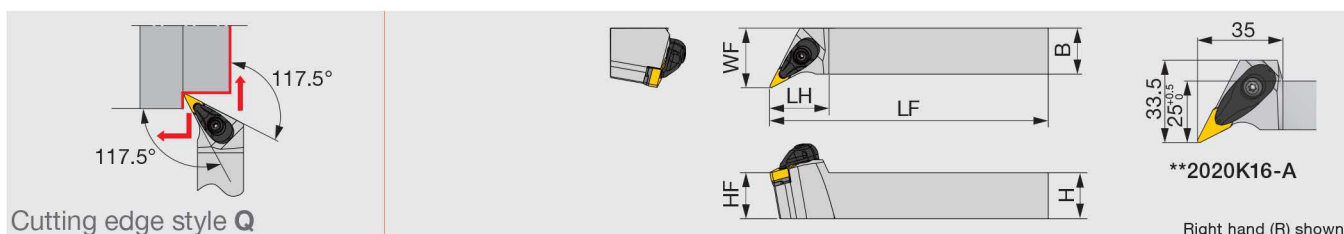

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
AVQNR/L2020K16-A	20	20	125	35	20	25	0.8	V/YN**1604...	3
AVQNR/L2525M16-A	25	25	150	35	25	32	0.8	V/YN**1604...	3

Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
AVQNR/L**16-A	ACP3L	ACS-5W	BP-7	SP-2.5	ASV322	CSTB-3.5	T-15F


AVQNR/L-CHP

Direct connection

Tube connection

Double clamping tool holders-117.5° approach angle.

For negative 35° or 25° rhombic insert. High-pressure coolant capability with tube and direct connections.

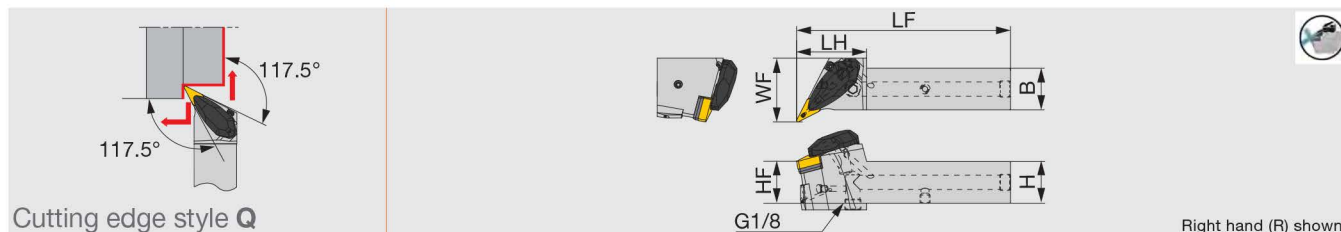

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	RE	Insert	Torque
AVQNR/L2020X16-CHP	20	20	114	41	20	25	0.8	V/YN**1604...	3
AVQNR/L2525X16-CHP	25	25	127	42	25	32	0.8	V/YN**1604...	3


Torque: Recommended clamping torque (N·m)

SPARE PARTS

Designation	Clamp	Clamping screw	Shim	Shim screw	Spring	Wrench	O-ring
AVQNR/L***16-CHP	ACP3L-CHP	SR 11800782	ASV322	CSTB-3.5	BP-4.5	T-15F	ORAS568-2.62X7.59

C-AVQNR/L

Double-clamp toolholder, with 117.5° approach angle, for negative 35°/25° rhombic inserts

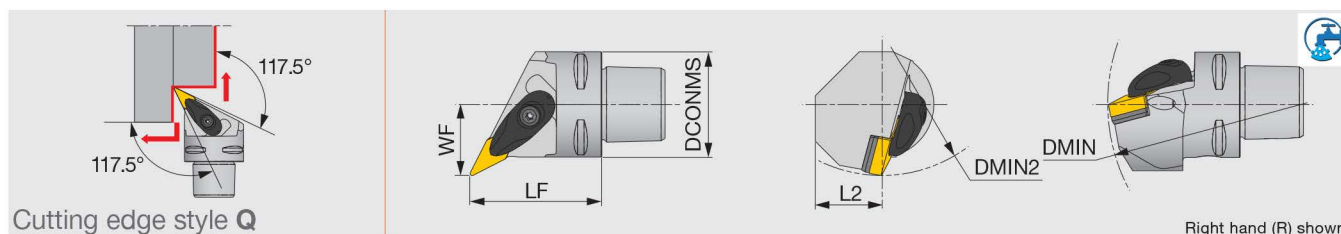

Right hand (R) shown.

Designation	DCONMS	LF	L2	WF	DMIN	DMIN2	RE	Insert
C4AVQNR/L27050-16N	40	50	25	27	145	110	0.8	V/YN**1604...

Applicable for 7 MPa coolant

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
C4AVQNR/L**-16N	ACP3L	ACS-5W	BP-7	SP-2.5	ASV322	CSTB-3.5	T-15F

Y-PRO SERIES


AVVNN-CHP

Direct connection

Tube connection

Double clamping tool holders-72.5° approach angle.

For negative 35° or 25° rhombic insert. High-pressure coolant capability with tube and direct connections.

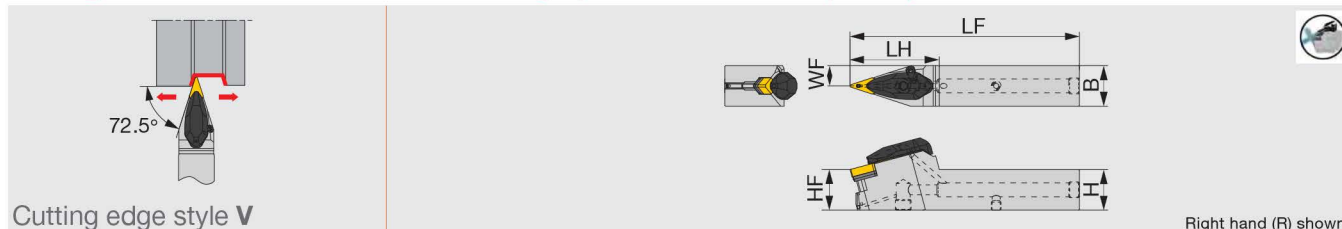

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	RE	Insert	Torque
AVVNN2020X16-CHP	20	20	127	55	20	10	0.8	V/YN**1604...	3
AVVNN2525X16-CHP	25	25	140	55	25	12.5	0.8	V/YN**1604...	3

Torque: Recommended clamping torque: N·m

SPARE PARTS


Designation	Clamp	Clamping screw	Shim	Shim screw	Spring	Wrench	O-ring
AVVNN**16-CHP	ACP3L-CHP	SR 11800782	ASV322	CSTB-3.5	BP-4.5	T-15F	ORAS568-2.62X7.59

PVQNR/L-CHP

Tube connection

Lever lock toolholders – 117.5° approach angle.

For negative 35°/25° rhombic insert. High-pressure coolant capability.

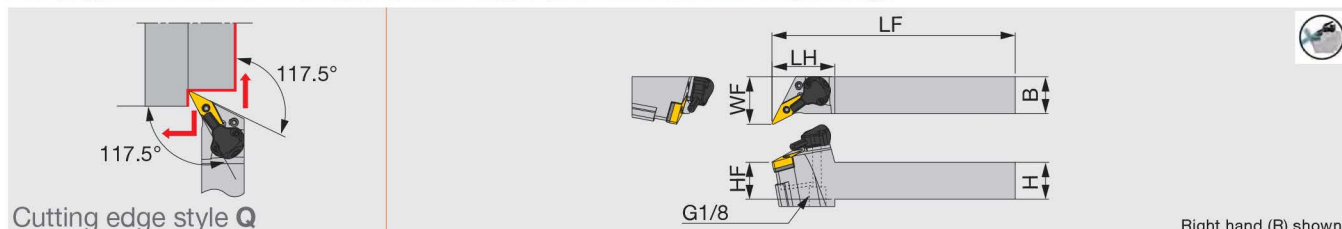

Right hand (R) shown.

Designation	H	B	LF	LH	HF	WF	RE**	Insert	Torque*
PVQNR/L2020K16-CHP	20	20	125	42.5	20	32	0.8	V/YN**1604...	2
PVQNR/L2525M16-CHP	25	25	150	42.5	25	32	0.8	V/YN**1604...	2

Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius

SPARE PARTS

Designation	Shim	Clamping screw	Wrench 1	Spring pin	Lever
PVQNR/L**16-CHP	LSV317	LCS3V	P-2.5	LSP3	LCL3V


SPARE PARTS

Designation	Coolant unit	Mounting screw	Wrench 2	O-ring	Coolant screw	Wrench 3
PVQNR/L**16-CHP	CU-V-CHP	SR M3	T-8F	OR 6.4X0.9N	SR M4X4 DIN913 TL360	P-2

Tungaloy Report No. 369-G

A-PVUNR/L

Lever-lock boring bar, for negative 35°/25° rhombic inserts

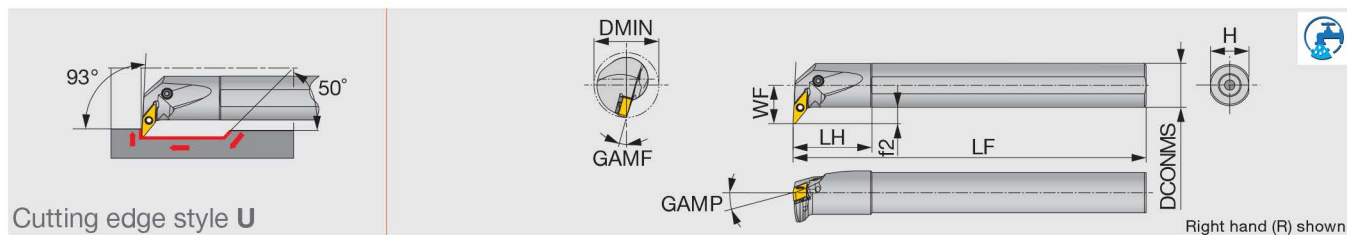

Designation	Material	DMIN	DCONMS	WF	LF	LH	H	f2	GAMP	GAMF	RE**	Insert	Torque*
A25R-PVUNR/L16-D370	Steel	37	25	22	200	45	23	9.5	-5°	-14°	0.8	V/YN**1604...	2.7
A32S-PVUNR/L16-D400	Steel	40	32	22	250	50	30	6	-5°	-12°	0.8	V/YN**1604...	2.7
A40T-PVUNR/L16-D500	Steel	50	40	27	300	60	37	7	-5°	-10°	0.8	V/YN**1604...	2.7

Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius


SPARE PARTS

Designation	Shim	Clamping screw	Wrench	Spring pin	Lever	Oil supply attachment*	Screw for oil hole*
A25R-PVUNR/L16-D370	LSV317BR/L	LCS3V	P-2.5	LSP3	LCL3V	EA-25	SSHM4-5
A32S-PVUNR/L16-D400	LSV317BR/L	LCS3V	P-2.5	LSP3	LCL3V	EA-32	SSHM4-5
A40T-PVUNR/L16-D500	LSV317BR/L	LCS3V	P-2.5	LSP3	LCL3V	-	SSHM5-6

*Optional

A-AVUNR/L

Double-clamp boring bar, for negative 35°/25° rhombic inserts

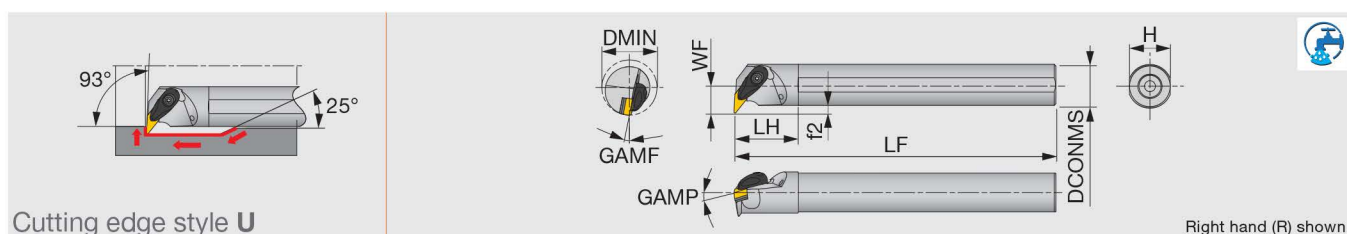

Designation	Material	DMIN	DCONMS	WF	LF	LH	H	f2	GAMP	GAMF	RE**	Insert	Torque*
A32S-AVUNR/L16-D400	Steel	40	32	22	250	50	30	6	-6°	-10°	0.8	V/YN**1604...	3
A40T-AVUNR/L16-D500	Steel	50	40	27	300	55	37	7	-6°	-8°	0.8	V/YN**1604...	3

Torque*: Recommended clamping torque (N·m)

RE**: Standard corner radius

SPARE PARTS

Designation	Clamp	Clamp screw	Spring	Spring pin	Shim	Shim screw	Wrench
A**-AVUNR/L16-D...	ACP3L	ACS-5W	BP-7	SP-2.5	ASV322	CSTB-3.5	T-15F

Y-PRO SERIES

STANDARD CUTTING CONDITIONS

For positive insert

ISO	Operation	Chipbreaker	Grades	Depth of cut <i>ap</i> (mm)	Feed <i>f</i> (mm/rev)	Cutting speed: <i>Vc</i> (m/min)		
						Low carbon steels, alloy steels	Medium carbon steels, alloy steels	High carbon steels, alloy steels
P	Precision finishing	JS	SH7025	0.5 - 3	0.02 - 0.2	10 - 200	10 - 200	10 - 200
	Finishing	ZF	GT9530	0.2 - 1.5	0.05 - 0.25	150 - 300	150 - 300	150 - 300
			NS9530	0.2 - 1.5	0.05 - 0.25	150 - 300	150 - 300	150 - 300
			T9215	0.2 - 1.5	0.05 - 0.25	120 - 350	100 - 350	80 - 250
			T9225	0.2 - 1.5	0.05 - 0.25	120 - 300	120 - 300	100 - 250
			T9235	0.2 - 1.5	0.05 - 0.25	50 - 200	50 - 200	50 - 150
	Finishing to medium	ZM	GT9530	0.5 - 2	0.05 - 0.3	150 - 300	150 - 300	150 - 300
			NS9530	0.5 - 2	0.05 - 0.3	150 - 300	150 - 300	150 - 300
			T9215	0.5 - 2	0.05 - 0.3	120 - 350	100 - 350	80 - 250
			T9225	0.5 - 2	0.05 - 0.3	120 - 300	120 - 300	100 - 250
T9235			0.5 - 2	0.05 - 0.3	50 - 200	50 - 200	50 - 150	
Stainless steels								
M	Precision finishing	JS	SH7025	0.5 - 3	0.02 - 0.2	10 - 200	10 - 200	10 - 200
	Finishing to medium	ZF	T6215	0.2 - 1.5	0.05 - 0.25	140 - 240	160 - 280	80 - 150
			AH6225	0.2 - 1.5	0.05 - 0.25	90 - 200	110 - 240	60 - 110
		ZM	T6215	0.5 - 2	0.05 - 0.3	140 - 240	160 - 280	80 - 150
			AH6225	0.5 - 2	0.05 - 0.3	90 - 200	110 - 240	60 - 110
Cast iron								
K	Finishing to medium	ZF	T9215	0.2 - 1.5	0.05 - 0.25	140 - 500	140 - 500	140 - 500
			T9225	0.2 - 1.5	0.05 - 0.25	140 - 500	140 - 500	140 - 500
		ZM	T9215	0.5 - 2	0.05 - 0.3	140 - 500	140 - 500	140 - 500
			T9225	0.5 - 2	0.05 - 0.3	140 - 500	140 - 500	140 - 500
Heat-resistant alloys								
S	Finishing to medium	ZF	AH8015	0.2 - 1.5	0.05 - 0.25	20 - 80	20 - 80	20 - 80
		ZM	AH8015	0.5 - 2	0.05 - 0.3	20 - 80	20 - 80	20 - 80


For negative insert

ISO	Operation	Chipbreaker	Grades	Depth of cut <i>ap</i> (mm)	Feed <i>f</i> (mm/rev)	Cutting speed: <i>Vc</i> (m/min)		
						Low carbon steels, alloy steels	Medium carbon steels, alloy steels	High carbon steels, alloy steels
P	Finishing	ZF	GT9530	0.2 - 1.5	0.03 - 0.2	150 - 300	150 - 300	150 - 300
			NS9530	0.2 - 1.5	0.03 - 0.2	150 - 300	150 - 300	150 - 300
			T9215	0.2 - 1.5	0.03 - 0.2	120 - 350	100 - 350	80 - 250
			T9225	0.2 - 1.5	0.03 - 0.2	120 - 300	120 - 300	100 - 250
			T9235	0.2 - 1.5	0.03 - 0.2	50 - 200	50 - 200	50 - 150
	Finishing to medium	ZM	GT9530	0.7 - 2	0.15 - 0.4	150 - 300	150 - 300	150 - 300
			NS9530	0.7 - 2	0.15 - 0.4	150 - 300	150 - 300	150 - 300
			T9215	0.7 - 2	0.15 - 0.4	120 - 350	100 - 350	80 - 250
			T9225	0.7 - 2	0.15 - 0.4	120 - 300	120 - 300	100 - 250
			T9235	0.7 - 2	0.15 - 0.4	50 - 200	50 - 200	50 - 150
Stainless steels								
M	Finishing	ZF	T6215	0.2 - 1.5	0.03 - 0.2	140 - 240	160 - 280	80 - 150
			AH6225	0.2 - 1.5	0.03 - 0.2	90 - 200	110 - 240	60 - 110
	Finishing to medium	ZM	T6215	0.7 - 2	0.15 - 0.4	140 - 240	160 - 280	80 - 150
			AH6225	0.7 - 2	0.15 - 0.4	90 - 200	110 - 240	60 - 110
Cast iron								
K	Finishing	ZF	T9215	0.2 - 1.5	0.03 - 0.2	140 - 500	140 - 500	140 - 500
			T9225	0.2 - 1.5	0.03 - 0.2	140 - 500	140 - 500	140 - 500
	Finishing to medium	ZM	T9215	0.7 - 2	0.15 - 0.4	140 - 500	140 - 500	140 - 500
			T9225	0.7 - 2	0.15 - 0.4	140 - 500	140 - 500	140 - 500
Heat-resistant alloys								
S	Finishing	ZF	AH8015	0.2 - 1.5	0.03 - 0.2	20 - 80	20 - 80	20 - 80
	Finishing to medium	ZM	AH8015	0.7 - 2	0.15 - 0.4	20 - 80	20 - 80	20 - 80

SHANKS

QC-1212

Shank for modular heads

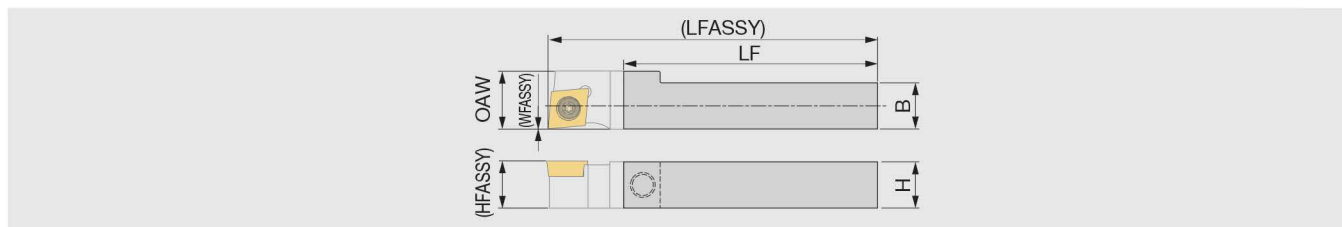

Designation	H	B	LF	OAW	WFASSY	HFASSY	LFASSY ⁽¹⁾	Torque*	Coupling size
QC-1212F	12	12	65	15	0	12	85	3	QC12
QC-1212X	12	12	100	15	0	12	120	3	QC12

Torque*: Recommended clamping torque (N·m)


(1) The size is true when the modular head with LH = 19.5 mm is mounted.

SPARE PARTS

Designation	Clamping screw	Wrench
QC-1212*	SRM6X0.5-26977	P-3

QC-1212/1616-CHP

Shank for modular heads, with high pressure coolant capability

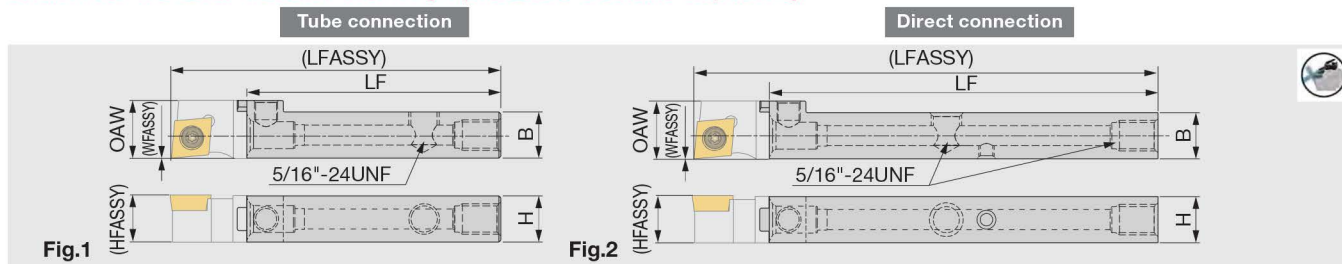

Designation	H	B	LF	OAW	WFASSY	HFASSY	LFASSY	Torque*	Coupling size	Fig.
QC-1212F-CHP	12	12	65	15	0	12	85 ⁽¹⁾	3	QC12	1
QC-1212X-CHP ^(*)	12	12	100	15	0	12	120 ⁽¹⁾	3	QC12	2
QC-1616X-CHP ^(*)	16	16	99	20	0	16	120 ⁽²⁾	8.5	QC16	2

Torque*: Recommended clamping torque (N·m)

(*) : Compatible to the direct internal coolant supply system without the use of external coolant hose.

(1) The size is true when the modular head with LH = 19.5 mm is mounted.

(2) The size is true when the modular head with LH = 21 mm is mounted.


SPARE PARTS

Designation	Clamping screw	Wrench 1	Coolant plug	Wrench 2	DirectJet plug	Wrench 3
QC-1212F-CHP	SRM6X0.5-26977	P-3	SR 5/16UNF TL360	P-4	-	-
QC-1212X-CHP	SRM6X0.5-26977	P-3	SR 5/16UNF TL360	P-4	SSHM4-6-TB	P-2
QC-1616X-CHP	SRM8X0.5	P-5	SR 5/16UNF TL360	P-4	SSHM4-6-TB	P-2

Y-PRO SERIES

QC-1216/1620-F15-CHP

Stepped-head shank for modular heads, with high pressure coolant capability

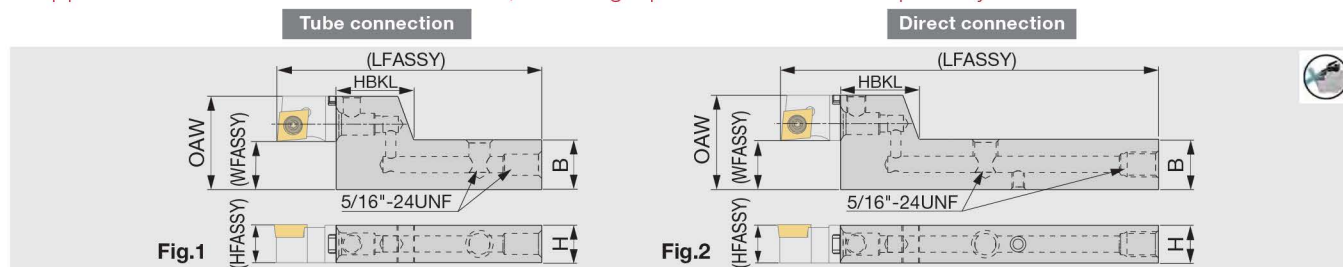

Designation	H	B	LF	OAW	WFASSY	HFASSY	LFASSY	HBKL	Torque*	Coupling size	Fig.
QC-1216F-F15-CHP	12	16	65	30	15	12	85 ⁽¹⁾	25	3	QC12	1
QC-1216X-F15-CHP (*)	12	16	100	30	15	12	120 ⁽¹⁾	25	3	QC12	2
QC-1620X-F15-CHP (*)	16	20	99	35	15	16	120 ⁽²⁾	30	8.5	QC16	2

Torque* : Recommended clamping torque (N·m)

(*) : Compatible to the direct internal coolant supply system without the use of external coolant hose.


(1) The size is true when the modular head with LH = 19.5 mm is mounted.

(2) The size is true when the modular head with LH = 21 mm is mounted.

SPARE PARTS

Designation	Clamping screw	Wrench 1	Coolant plug	Wrench 2	DirectJet plug	Wrench 3
QC-1216F-F15-CHP	SRM6X0.5-26977	P-3	SR 5/16UNF TL360	P-4	-	-
QC-1216X-F15-CHP	SRM6X0.5-26977	P-3	SR 5/16UNF TL360	P-4	SSH4-6-TB	P-2
QC-1620X-F15-CHP	SRM8X0.5	P-5	SR 5/16UNF TL360	P-4	SSH4-6-TB	P-2

PARTS FOR COOLANT HOSE

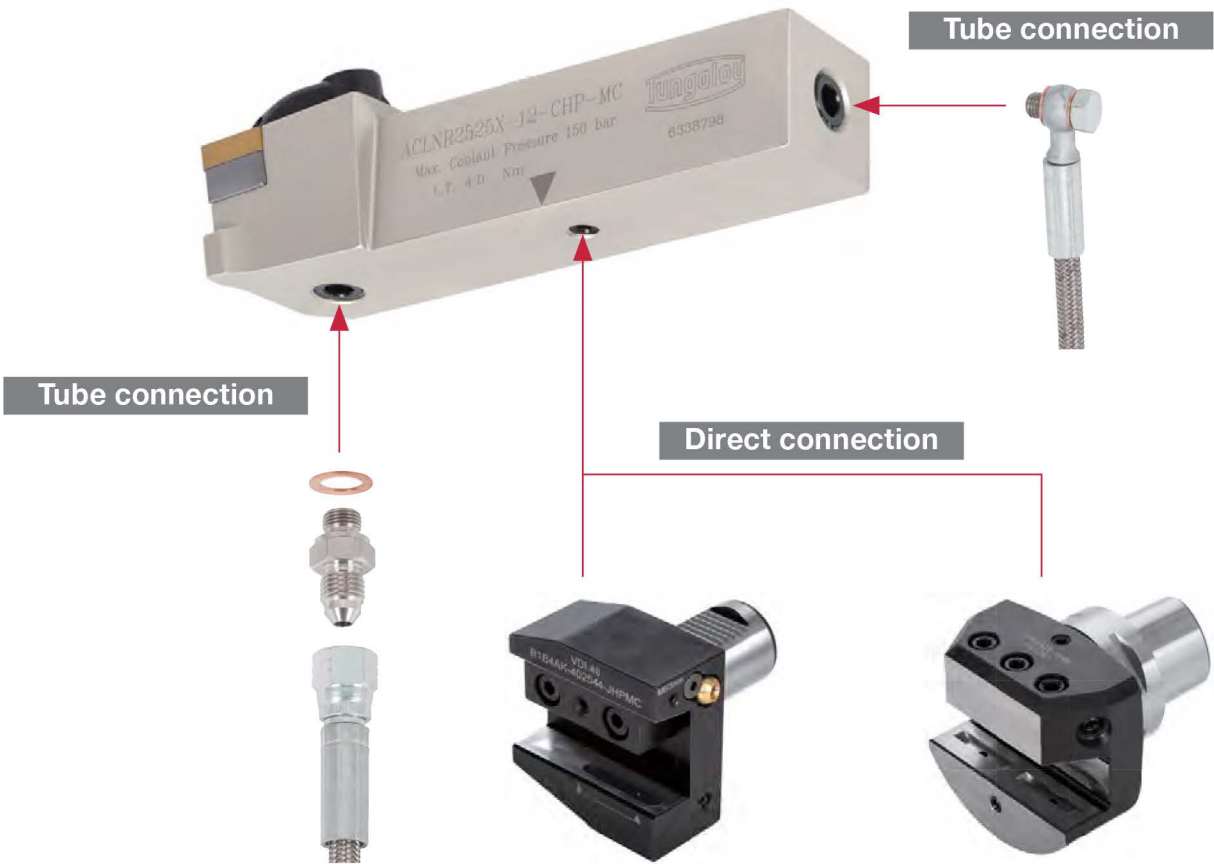

Y-PRO SERIES

PARTS FOR COOLANT HOSE

Connecting hose

Fig. 1



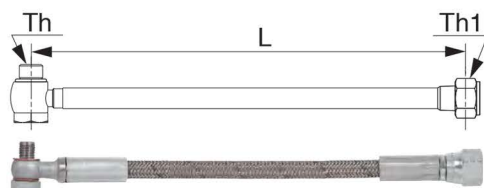


Fig. 2

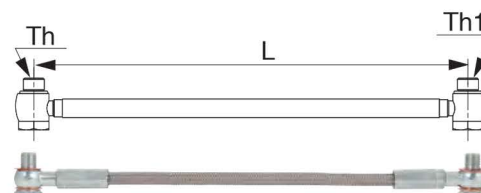


Designation	Length L	Threading size		Max. pressure (Mpa)	Fig.
		Th	Th1		
CHP-HOSE-G1/8-7/16-200BS	200	G1/8"-28 BSPP	7/16"-20 UNF	20	1
CHP-HOSE-G1/8-7/16-250BS	250	G1/8"-28 BSPP	7/16"-20 UNF	20	1
CHP-HOSE-5/16-7/16-200BS	200	5/16"-24UNF	7/16"-20 UNF	20	1
CHP-HOSE-5/16-G1/8-200BS	200	5/16"-24UNF	G1/8"-28 BSPP	20	1
CHP-HOSE-G1/8-G1/8-200BB	200	G1/8"-28 BSPP	G1/8"-28 BSPP	20	2
CHP-HOSE-G1/8-G1/8-250BB	250	G1/8"-28 BSPP	G1/8"-28 BSPP	20	2

Connector

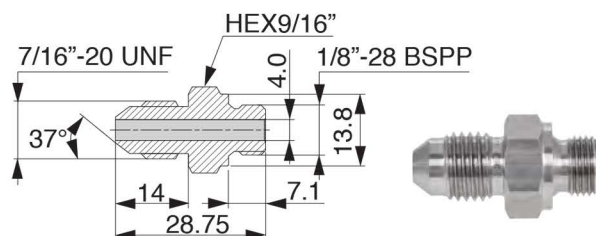


Designation
CHP-NIPPLE-G1/8-7/16UNF

Seal washer




Designation	øD	ød	W
CHP-COPPER-SEAL1/8	15	10	1
CHP-COPPER-SEAL5/16	11.9	8.15	1.35
CHP-COPPER-SEAL5/16-2.5	9.4	8	2.5

Connector for small lathe with seal washer

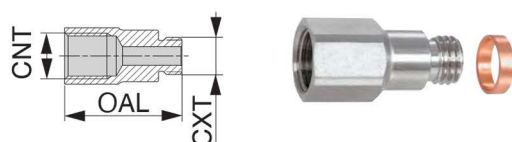




Designation	CNT	CXT	OAL
CHP-CONNECTOR5/16-G1/8	G1/8"-28 BSPP	5/16"-24 UNF	25
CHP-CONNECTOR-G1/8-R1/8	G1/8"-28 BSPP	R1/8"-28 BSPT	25

Connector elbow

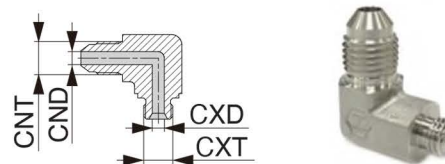

Designation	CNT	CND	CXT	CXD
CHP-ELBOW-90-G1/8-7/16UNF	7/16"-20 UNF	4.4	1/8"-28 BSPP	4
CHP-ELBOW-90-5/16-7/16UNF	7/16"-20 UNF	4.4	5/16"-24 UNF	4

PRACTICAL EXAMPLES

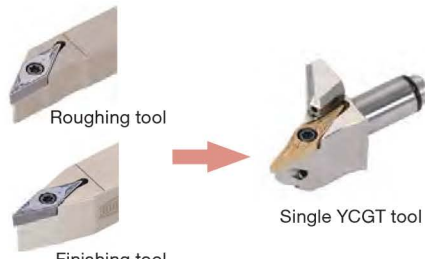Workpiece type		Fitting	Shaft
Toolholder		JSYJ2CR1212X10	QC12-JSYJ2CR10-CHP
Insert		New YCGT100202MF-JS	New YCGT100202MF-JS
Grade		SH7025	SH7025
Workpiece material		SUS304 / X5CrNi18-10	S45C / C45
		 M	 P
Cutting conditions	Cutting speed : V_c (m/min)	85	70
	Feed : f (mm/rev)	0.03	0.02
	Depth of cut : a_p (mm)	0.075	0.3
	Machining	External turning	External turning
	Coolant	Wet	Wet
Results		 Tool life 1.75 times! Traditionally, machining the thread-end taper requires a dedicated insert shape. YCGT performs this operation while delivering 1.75 times longer tool life.	 Conventionally, two different tools were required for external turning and profiling. YCGT integrates both functions into a single tool.
Workpiece type		Pulley	Automotive part
Toolholder		AVVNN2525M16-A	A16Q-SYUBR11-D200
Insert		YNMG160404-ZM	YWMT11T204-ZF
Grade		GT9530	T9215
Workpiece material		SCM415	SACM645
		 P	 P
Cutting conditions	Cutting speed : V_c (m/min)	250	100
	Feed : f (mm/rev)	0.5	0.5
	Depth of cut : a_p (mm)	0.1 - 0.2	0.2
	Machining	External turning	Internal turning
	Coolant	Wet	Wet
Results		 Tool life 1.25 times! Chip control was drastically improved against conventional grooving tool. 1.25 times longer tool life achieved.	 Chips by -ZF chipbreaker Chip control and surface finish are improved drastically when internal turning.

CONTACT US

mgt

MEGA TECH
METALWORK



MEGA TECH METALWORK CO.,LTD (Headquarter)



Tel : 02-943-1591



Line ID : @mgt_metalwork



Email : sales.m@mgtg.co.th



Web : <https://www.mgtg.co.th/>



17/4 Soi Ramintra 89
Ramintra Khannayao
Bangkok 10230



For more
Information

SCAN NOW

